

WIDE RANGE OF CAR BODY CONSUMABLES

CAR BODY CONSUMABLES <u>Abrasives</u>

Surface cleaning

<u>Masking</u> Polishing

Sealants and adhesives

Protective compounds

Gluing tapes

Accessories
RADEX R.C.S

EQUIPMENT AND PROTECTIVE CLOTHING Equipment

Pneumatic tools

Protective clothing

CAR BODY COATINGS FOR REPAIR

Putties Primers


<u>Clearcoats</u> Aerosols

STAR

Spray guns Filters

Accessories



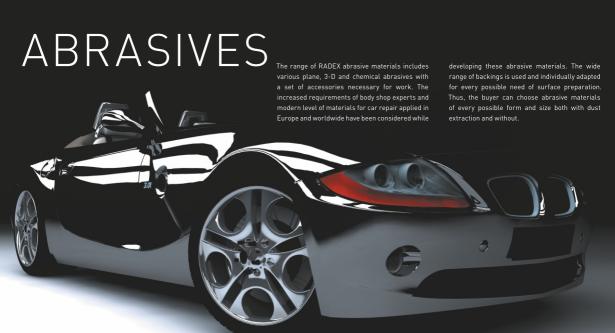

GOLD SERIES





GOLD ABRASIVE PAPER DISCS WITH VELCRO, 15 HOLES

Abrasive paper discs with holes for dust extraction with premium quality aluminum oxide mineral combining high abrasive ability and high wear resistance.

Function: abrasive paper discs with holes are developed for continuous effective sanding of metals, paint materials, putties, plastics, wood, etc., with use of sanding equipment with dust extraction system. They are recommended to use in such areas as repair and conveyor car painting, wood and metal working, manufacture of furniture, household applicance, etc.

Art.	Size	Grit	Package
553601		P40	— 50/400 pcs.
553602		P60	— 50/400 pcs.
553603		P80	
553604		P100	
553605		P120	
553606		P150	
553607		P180	
553608		P220	
553609		P240	— 100/800 pcs.
553610	Ø 150 mm	P280	— 100/800 pcs.
553611		P320	
553612		P360	
553613		P400	
553614		P500	
553615		P600	
553616		P800	_
553617		P1000	
553618		P1200	- F0//00
553619		P1500	— 50/400 pcs.
553620		P2000	



GOLD ABRASIVE PAPER DISCS WITH VELCRO. 8 HOLES

Abrasive paper discs with holes for dust extraction with premium quality aluminum oxide mineral combining high abrasive ability and high wear resistance.

Function: abrasive paper discs with holes are developed for continuous effective sanding of metals, paint materials, puties, plastics, wood, etc., with use of sanding equipment with dust extraction system. They are recommended to use in such areas as repair and conveyor car painting, wood and metal working, manufacture of furniture, household appliances, etc.

	512501
	512502
	512503
	512504
	512505
	512506
	512507
Ø 125	512508
	512509
	512510
	512511
	512512
	512513
	512514
_	512515
	_



/400 pcs.

Perfect in combination with Random orbital sander fart. 42025, art. 42050), 2-Handrandom orbital sander fart. 42052, art. 42050), 2-Handrandom orbital sander fart. 42045 art. 4204521. For use with RADEX universal back-up pad, art. 500002, or RADEX multihole back-up pad, art. 500566 see "Pneumatic loot" section).



GOLD ABRASIVE PAPER ROLLS

Abrasive paper rolls with premium quality aluminum oxide mineral combining high abrasive ability and high wear resistance.

Function: abrasive paper in rolls is the most efficient type of material from the cost-effectiveness point of view developed for continuous sanding of metals, paint materials, putties, plastic, wood, etc., by hand or by hand blocks. They are recommended to use in repair and conveyor car painting, wood and metal working, manufacture of furniture, household apollances, etc.

Art.	Size	Grit	Package
552040		P40	1/4 pcs.
552060		P60	
552080		P80	_
552100		P100	_
552120		P120	
552150		P150	_
552180		P180	
552220	— 115 mm — — x 50 m —	P220	- 1/0
552240		P240	– 1/8 pcs.
552280		P280	
552320		P320	-
552360		P360	
552400		P400	_
552500		P500	_
552600		P600	_

GOLD 2 ABRASIVE PAPER ROLLS

High quality abrasives in rolls. Open type abrasive with special coatings makes good cutting on many surfaces. Good price and performance balance saving money in the process.

	Size	Grit	Package
556060		P60	1/4 pcs.
556080		P80	
556100		P100	-
556120		P120	_
556150		P150	
556180		P180	
556220	115 mm	P220	
556240	x 50 m	P240	1/5 pcs.
556280		P280	_
556320		P320	
556360		P360	
556400		P400	_
556500		P500	
556600		P600	



GOLD ABRASIVE PAPER SOFT ROLLS

Abrasive paper soft rolls with perforation with premium quality aluminum oxide mineral combining high abrasive ability, high wear resistance and flexibility. Rolls are supplied in special dispenser boxes for convenience in use and storage.

Function: abrasive paper soft rolls are intended for use in difficult areas, for shaping and edge sanding. An ideal fit for hand sanding in difficult areas prior to applying top coats.

			Package
555306		P180	
555308		P240	
555310	— — — — 114 mm —	P320	
555312	_ x 25 m _	P400	1/4 pcs.
555313		P500	
555314		P600	
555315		P800	



GOLD ABRASIVE PAPER SHEETS WITH VELCRO, NO HOLES

Function: abrasive paper sheets without holes are developed for continuous effective sanding of metals, paint materials, puttles, plastic, wood, etc., with use of sanding equipment without dust extraction system. They are recommended to use in areas such as repair and conveyor car painting, wood and metal working, manufacture of furniture, household appliances, etc.

555202		P60	50/400 pcs.
555203		P80	
555204		P100	_
555205	-	P120	_
555206		P150	
555207		P180	_
555208	70 x 420 mm	P220	— 100/800 pcs.
555209		P240	— Townson pes.
555210	-	P280	_
555211	-	P320	_
555212	-	P360	_
555213		P400	_
555214		P500	

GOLD ABRASIVE PAPER SHEETS

Function: abrasive paper sheets without holes are developed for continuous effective sanding of metals, paint materials, puttles, plastic, wood, etc., with use of sanding equipment without dust extraction system. They are recommended to use in areas such as repair and conveyor car painting, wood and metal working, manufacture of furniture, household appliances, to

555003			
555004		P100	
555005		P120	
555006		P150	
555007		P180	
555008		P220	
555009	230 x 280 mm	P240	50/1000 pcs.
555010		P280	
555011		P320	
555012		P360	
555013		P400	
555014		P500	



GOLD ABRASIVE PAPER SHEETS WITH VELCRO AND HOLES

Function shrasive paper sheets with holes are developed for continuous effective sanding of metals, paint harbarists, putiles, paint, wood, etc., who use of sanding equipment with dust extraction system. Wier or system high productively when sanding putiles and primers. They are recommended to use in areas such as repair and conveyor car painting, wood and metal working, manufacture of furniture. Associated applications.

550802		P60	
550803	-	P80	_
550804		P100	
550805	-	P120	_
550806		P150	
550807	-	P180	_
550808	70 x 127 mm, — 8 holes —	P220	100/800 pcs.
550809	o notes _	P240	
550810	-	P280	_
550811		P320	
550812		P360	_
550813		P400	
550814		P500	
551802		P60	
551803		P80	
551804		P100	
551805		P120	
551806		P150	
551807		P180	
551808	70 x 198 mm, — 8 holes —	P220	100/800 pcs.
551809	e notes —	P240	
551810		P280	
551811		P320	
551812		P360	
551813		P400	
551814		P500	
551402		P60	50/400 pcs.
551403		P80	
551404		P100	
551405		P120	
551406		P150	
551407		P180	
551408	70 x 420 mm. — 14 holes —	P220	
551409	. In notes —	P240	— 100/800 pcs.
551410		P280	_
551411		P320	
551412		P360	
551413		P400	_

GREEN FILM ABRASIVES

GREEN FILM ABRASIVES IS A NEW RANGE OF HIGH-QUALITY PLASTIC FILM ABRASIVE MATERIALS HAVING DIFFERENT CHARACTERISTICS SUCH AS PERFECT CULTING PRODUCTIVITY EXCELLENT ANTI-LOADING COVERING DURARILITY AND RESISTIBILITY ELEXIBILITY AND CONSISTENT FINISH

GRIP

GREEN FILM ABRASIVE DISCS, 8 HOLES

Abrasive discs on plastic film base with holes are specially developed for continuous effective sanding of metals, paint materials including ceramic, putties, plastic, wood, etc., with use of sanding equipment with dust extraction system. They are recommended for use in such areas as repair and conveyor car painting, wood and metal working, manufacture of furniture, household appliances, etc.

612503		P80	
612504		P100	
612505		P120	_
612506	- Ø 125 mm -	P150	— 100/800 pcs.
612507	- b 125 mm -	P180	— 100/600 pcs.
612509		P240	_
612511		P320	
412512		PANN	



GREEN FILM ABRASIVE DISCS, 15 HOLES

Abrasive discs on plastic film base with holes are specially developed for continuous effective sanding of metals, paint materials including ceramic, putties, plastic, wood, etc., with use of sanding equipment with dust extraction system. They are recommended for use in such areas as repair and conveyor car painting, wood and metal working, manufacture of furniture, household appliances, etc.

661501		P40	— 50/400 pcs.
661502		P60	— 50/400 pcs.
661503		P80	
661504		P100	
661505		P120	
661506		P150	-
661507		P180	_
661508		P220	
661509	– 0 150 mm –	P240	— 50/500 pcs.
661510	- wisumm -	P280	50/500 pcs.
661511		P320	
661512		P400	
661513		P500	_
661514		P600	
661515	-	P800	_

P360

661520 Perfect in combination with Random orbital sander (art. 420025, art. 420050), 2- Hand random orbital sander (art. 420252) or 2-Hand gear-driven sander lart. 420450, art. 420452) For use with RADEX universal back-up pad, art, 500002, or RADEX multihole back-up pad, art, 500556 [see "Pneumatic tool" section



CERAMIC ABRASIVES

CERAMIC ARRASIVES ARE DESIGNED TO GET MUCH EASTER CULTING COMPARED TO OTHER PREMIUM ARRASIVES IN THE MARKET SPECIAL CERAMIC GRAINS WITH THE REST FILM TECHNOLOGY FOR FAST CUTTING AND EXTRA LONG LIFE. SPECIAL PATTERN COLLECTS DUST MORE EFFICIENTLY FOR A CLEANER WORKING ENVIRONMENT THE PRODUCT GUARANTEES SANDING WITHOUT CLOGGING THE SANDING

MULTI-AIR CERAMIC ARRASIVE DISCS

		Package
	P80	
	P120	
	P150	
	P180	
_	P220	_
Ø 150 mm	P240	50/500 pcs.
	P320	_
_	P400	_
	P500	
_	P600	_
-	P800	_
	Ø 150 mm	P120 P150 P180 P220 0 150 mm P240 P320 P400 P500 P800




Perfect in combination with Random orbital sander (art. 420025, art. 420050), 2-Hand random orbital sander (art. 420252) or 2-Hand gear-driven sander (art. 420450, art. 420452). For use with RADEX multihole back-up pad, art, 500556 (see "Pneumatic tools" section).



CERAMIC FILM ROLL

Heat resistance, high strength, anti-deformation, ultra-even surface, excellent flexibility, and workpieces having a smoother finish are the characteristics that define RADEX Ceramic film roll. Special anti-clog coating ensures effective sanding dust removal and prevents clogging. thus optimizing product performance. It features a smoother surface than abrasive cloth and offers better strength and dimensional stability than abrasive paper. Additionally, it is waterproof and oilresistant, making it suitable for use in both wet and dry conditions. They are ideal for auto body painting and polishing, woodworking, metal polishing, furniture finishing, fiberglass work, primers, and

558080	70 mm x 12 m	P80	
558120		P120	
558180		P180	1/4 pcs.
558240		P240	I/e pcs.
558320		P320	
558400		P400	



PURPLE CERAMIC ABRASIVE DISCS, 14+1 HOLES

575002		P60	
575003		P80	
575005		P120	
575006		P150	
575007		P180	_
575008	Ø 150 mm -	P220	— 100/1000 pcs.
575009	w ioumm -	P240	— 10071000 pcs.
575011		P320	_
575013		P400	_
575014		P500	
575015		P600	



Perfect in combination with Random orbital sander lart. 420025, art. 420050], 2-Hand random orbital sander lart. 420532] or 2-Hand gest-driven sander lart. 420450, art. 420452]. For use with RADEX universal back-up pad, art. 500002, or RADEX multihole back-up pad, art. 500056 [see "Pneumatic tool" section].



CERAMIC NET ABRASIVES

CERAMIC NET ABRASIVES PROVIDES BETTER PRODUCTIVITY AND PROFITABILITY SINCE CLOSGING IS MINIMIZED, OFFERING HIGHER PERFORMANCE AND BETTER SUBFACE FINISHING, NET BACKING FABLES FULL SURFACE DUTS EXTRACTION HANKES TO THE OPEN BACKING STRUCTURE. HIGH ALSO PROVIDE A HEALTHIER WORK ENVIRONMENT, WHERE LESS TIME AND EFFORT IS NEEDED FOR CLEANING UVEWHILST THE WORKER IS PROTECTED FROM DANSEMOUS SANDING DUTS.

CERAMIC NET ABRASIVE DISCS

559903		P80	
559905		P120	F
559907	- Ø 150mm -	P180	F
559909		P240	- 50/400 pcs.
559911		P320	300400 pcs.
559913		P400	
559914		P500	
559915		P600	F.

Perfect in combination with Random orbital sander lart. 420025, art. 420050, 2-Hand random orbital sander lart. 420250 or 2-Hand gear-driven sander lart. 420450, art. 420452. For use with RADEX universal back-up pad, art. 500002, or RADEX multible back-up cad, art. 500506



CERAMIC NET ABRASIVE SHEETS

[see "Pneumatic tools" section].

559703		P80	
559705		P120	-
559707	— 70x420 mm -	P180	- 50/400 pcs.
559709	- /01420111111	P240	- 50/400 pcs.
559711		P320	=
559712		DKOO	



RADEX FLEX ABRASIVES HAS A UNIQUE GRAIN STRUCTURE ON AN INNOVATIVE LATEX BACKING WHICH IS IDEAL FOR CURVED 1075 AND ROUND PARTS. IT GIVES AN EXTERMELY UNIFORM AND SHALLOW. SANDING SCRATCH WITH MAXIMUM CONTROL. A GREAT TIME SAVER BOTH DURING THE PREP AND UDINGS FINISHING, WHERE WE HAVE THE ADVANTAGE OF DRY SANDING.



FLEX ABRASIVE DISCS

531500		Brown	P1500	
532500	Ø 152mm	Light green	P2500	25/500 pcs.
533000		Grey	P3000	_
532575	- 0.75mm -	Light green	P2500	- 25/800 pcs.
	- הmmc/שי-			 25/800 pcs.

Perfect in combination with Random orbital sander fart. 420025, art. 420050), 2-Hand random orbital sander fart. 420522) or 2-Hand gear-driven sander fart. 420450, art. 4204521. ol 152mm discs for use with RADEx universal back-up pad, art. 50090, or RADEX multihole back-up pad, art. 500956. O'75mm discs for use with RADEX PAD Hook-up 75mm, art. 421555 face "Pneumatic tools" section.





FLEX ABRASIVE SHEETS

330400		Sky	P600	
330800	- 130 x 170 —	Lemon	P800	25/250 pcs.
331200		Oranne	P1500	



ABRASIVE SPONGES

Abrasive sponges with silicon carbide and aluminum oxide minerals combine extremely high abrasive capability and wear resistence. Soft polyurethne backing provides full contact of abrasive with the working surface whatever its shape. Function: abrasive sponges are intended for continuous effective hand sanding of metals, paint materials, puttles, plastic, wood, etc. Abrasive sponges can be

Function abrasive sponges are intended for continuous effective hand sanding of metals, patim netrals, patim, spaist, wood, etc. Abrasive sponges can be used with or dy in official ranes, for shaping and edge sanding. They are more used to the continuous effective spains and edge sanding. They are more to the continuous effective spains and edge sanding. They are more to the continuous effective spains and the continuous effective spains and fine are used for sanding before grimm applications, Suprefine - for finishing primers before crylic and dark cicle in spitzalations, further and Microfilier - finishing primers before crylic and dark cicle in spitzalations, further and Microfilier - finishing primers before crylic and dark cicle in spitzalations, such as light metallic and pearls.

320180		Medium	
320280		Fine	
320400	140 x 115 mm	Superfine	20/80 pcs.
320600		Ultrafine	
220800		Microfine	



ABRASIVE SPONGE DISCS

Abrasive sponges of high quality with different grits. White aluminum oxide tend minerals. Due to their composition, they are extremely resistant, resulting in a longer working life of the abrasive. They are weakhele and results in a one of the discovery of the abrasive with the area of the ar

333152	150 x 5 mm	Superfine	- 1/50 pcs.
333153	130 X 5 11111	Microfine	- 1/50 pcs.



DOUBLE SIDED ABRASIVE SPONGES

A flexible manual solution for shaped and profiled surfaces that are challenging to reach with machine, such as bumpers and door handle cutous. Tranks to innovative system technology, the pad is coated on both sides and can be used on wet or dry surfaces. It is available in three grits to accommodate the complete sanding process.

333001	A 1 (21)	P400-P500	Brown		
333002	98 x 120 mm	P600-P800	Green	1/100 pcs.	
222002		D1000 D1200	Minter		



WPF WATERPROOF ABRASIVE SHEETS

Waterproof abrasive sheets are made of latex paper with the use of silicon carbide and aluminum oxide minerals, combining extremely high abrasive capability and wear resistance.

Function: waterproof abrasive sheets can be used wet or dry for various surface preparations in such areas as OEM, Automotive Aftermarket, Wooden and Metal industries, etc.

Ideally sieved mineral

Features:

- Increased mineral durability
- High backing elasticity and resistance for curling
 Possible to use wet or dry

310101		P80	25/500 pcs.
310102		P100	
310103		P120	
310104		P150	
310105	_	P180	_
310106	_	P220	_
310107		P240	
310108		P280	
310109	– 230 x 280 mm	P320	
310110	- 230 x 260 mm	P360	50/1000 pcs.
310111	-	P400	_
310112	_	P500	_
310113	_	P600	_
310114	-	P800	-
310115	-	P1000	-
310116		P1200	
310117		P1500	



FIBER DISCS

High-performance durable discs with aluminum oxide and zirconium minerals, up to date resin binders and fiber backing. Due to advanced technologies implemented in manufacturing of fiber discs they are less brittle, leading to to increased productivity and longer life.

P2000

Function: fiber discs are intended for grinding different types of metals in small and hard to reach places such as weld joints, door shuts, wheel arches, etc. Fiber discs have a special quick connection system that simplifies and speeds up the process of attaching/detaching them to the backing pad.

Art.	Size	Grit	Package
555536		P36	
555550	Ø 50 mm	P50	25/200 pcs.
555560		P60	20/200 pcs.

Perfect in combination with Air angle die grinder (art. 420510 and 420515).

SOFTMATT SERIES

UNLIKE USUAL PLANE ABRASIVE MATERIALS, SOFTMATT AND SOFTMATT LITE ARE 3-DIMENTIONAL AND REPRESENT A NONOVEN PROQUE SAGE MEMPROAITED WITH AN ARRASIVE SUBSTAINCE. APPLICATION OF BASES WITH DIFFERENT HARDNESSES TOGETHER WITH DIFFERENT TYPES OF MINERALS AND GRITS ALLOWS TO CREATE A WIDE RANGE OF PRODUCTS FOR VARIOUS APPLICATION.



SOFTMATT NONWOVEN ABRASIVES IN SHEETS AND DISCS

Nonwoven nylon material with abrasive impregnation in sheets, discs and rolls. It is manufactured in two color versions: violet and grey.

Function: material is intended for matting the surface, including difficult areas prior to applying any types of coatings. Ideal to use with RADEX Matt&Flatt Matting compound.

Features:

- · Durability and profitability
- Application of a high-quality abrasive material with super sharp cutting grains provides high efficiency
- The unique even structure of a fiber provides ideally matt surface without gloss
 Application of the newest technology in spreading abrasives allows to impregnate the material completely for all its thickness, tremendously increasing working time
- Ideal surface preparation prior to applying coatings
- is reachwith the use of «Grey» version of the material

sheets	330000	- 150 x 230 mm —	violet	very fine	20/160
330001	330001	- 150 x 230 mm —	grey	ultra fine	pcs.
discs —	330006	- Ø 150 mm -	violet	very fine	20/200
	330007	- וווווו טפו ש	grey	ultra fine	pcs.
rolls ·	330003	115 mm	violet	very fine	
	330004	_ x 10 m _	arev	ultra fina	· 1 pc.

SOFTMATT PLUS ABRASIVE NONWOVEN MATERIAL IN SHEETS

Upgraded nonwoven nylon material with abrasive impregnation in sheets. It is manufactured in two color versions: grey and red.

Function: material is intended for matting the surface, including difficult areas prior to applying any types of coatings. Ideal to use with RADEX Matt&Flatt Matting compound.

330010	115 x 230 mm	red	- 25/100 pcs.
330011	115 x 230 mm	grey	- 25/100 pcs.



MATT&FLATT MATTING COMPOUND

Matting compound of grey color supplied in a special bottle with dispenser.

Function: matting compound is a composition of liquid chemicals and abrasive intended for surface preparation prior to blending and new panel overpainting. It is suitable for any type of paint including water based

Features:

- · Fits all types of paints
- · Produces even matt surface Easy to apply
- Easy to remove with no trace

170500	1 kg	1/6 pcs.
170501	0.5 kg	1/12 pcs.

RECOMMENDATIONS











better matting

DRY CONTROL POWDER

Defect detection dry coat is a fine black color powder in dispenser with applicat It is used in the motor industry to mark areas on car bodies that need to be worked or







SURFACE CLEANING



Cleaning the surface is a very important process in automotive repair. The final result depends on how the surface is prepared and cleaned. RADEX offers a wide range of different types of cloths which perfectly remove dirt, dust and other contaminants,



DUST REMOVING ADHESIVE NAPKINS

Due to high quality materials and unique modern technology in production, these napkins perfectly gather and keep small particles, leave no traces of impregnation on the surface, lint free.



DUST RAG DUST REMOVING ADHESIVE NAPKINS ON GAUZE BASE

Impregnated adhesive antistatic napkins made of unbleached cotton gauze.

160301	75 x 55 cm	100% cotton	16 g/m²	1/250 pcs.



WAVY DUST RAG DUST REMOVING ADHESIVE NAPKINS

Impregnated adhesive antistatic napkins made of unbleached cotton gauze Ideal for large surfaces.

Function: napkins are used for removing dust, perfectly gather and keep small particles, leave no traces of impregnation on the surface, lint free. Also ideal to quickly remove dust from furniture or other wood, plastic and metal surfaces.

160303	80 x 90 cm	100% cotton	20 g/m²	1/100 pcs.



DUST FLAT 3D DUST REMOVING ADHESIVE NAPKINS FROM 3D SYNTHETIC FELT

Impregnated adhesive antistatic napkins made of synthetic felt.

160302	20 x 20 cm	100% polyester	80 g/m²	10/250 pcs.

DEGREASING NAPKINS

Degreasing napkins are intended for optimal preparation of all surfaces, removing various organic and non-organic contaminants, and for cleaning surfaces with solvents and detergents.



ABSORBENT WIPE COST-EFFECTIVE DEGREASING NAPKINS

Degreasing polypropylene napkins in perforated roll with perfect absorbing properties. They are solvent resistant. Lint free. Cost-effective. Have good rate and speed of moisture absorption. Produced using "Mett Blown" technology.

160102 32x38 cm 100% polypropylene 60 g	/m² 250 pcs. in roll



CLEANING CLOTH ROLL

High quality 3-layer cleaning cloth for degreasing and cleaning body panels, 100% cellulose.

Function: RADEX Cleaning cloth is tear resistant, lint free and highly absorbent. Fits RADEX floor and wall paper dispensers.

160103	37x37 cm	1000 pcs. in roll



MIII TI SPONGE

To be used exclusively with water and universal cleaning products, is suitable for cleaning all dirty surfaces. Multi-sponges are slightly abrasive which improves cleaning power.

681100 130x80x30 mm 1 pc.	PAI G	5126	1 ackage
	681100	130x80x30 mm	1 pc.





TRIM MASKING TMA TAPE

Special masking tape in roll for rubber parts around windows. It consists of masking tape and durable clear plastic strip. Trim masking TMA Tape is resistant to solvents and moisture. Temperature resistance up to 120°C. Trim masking TMA Tape is suitable for practically all types of cars. It is perforated and easy to tear.

Function: special masking tape is intended for masking rubber parts around windows. It allows masking simultaneously rubber gaskets around windows and Lifting it for overpainting beneath the strip

130010	10 mm x 10 m	
130015	15 mm x 10 m	1/10 pcs.
130019	19 mm x 10 m	



MASKING FOAM TAPE

Masking foam tape made of white polygrethane foam with heat resistant glue strip applied on one side. Masking foam tape is supplied in a pre-cut roll which is placed in a special dispenser box for convenience in use and storage.

Function: flexible foam tape is intended for masking joints between panels prior to overpainting. Allows to hide any traces of repair, as they do not leave sharp edges. a barrier for dust or spatter genetrating inside the car. Masking foam tage doesn't leave traces of glue after removal.

	670013	13 mm X 55 m	
FT	670017	17mm x 40 m	1 pc.
T-FOAM	670110	11 mm x 25 m	1 pc.



RECOMMENDATIONS-

- . Apply to clean and degreased surface. Do not prolong
- . Pull one foam strip from the roll. · Press the foam strip to a surface
- · Avoid the foam adhesive contact with paint
- . Apply in doorway no closer than 3-5 mm from the edge.
- . After drying remove the foam tape from the surface.





FINE LINE TAPE

Fine Line Tape in rolls is very thin self adhesive blue vinyl tape with good solvent resistance, high conformability and a smooth, sharp mask-off edge. The blended rubber based adhesive system offers high temperature resistance through bake cycles up to 155°C for 45 minutes. Fine Line Tape is durable, easy to apply and to remove after use. It doesn't leave any residue. Service temperature range is from 0°C to 155°C

Function: Fine Line Tape is intended for design and multicolor overpainting as well as for critical applications such as extremely irregular shapes, over rivets and welds. Also suitable for masking protective rubber strips.

120103	3 mm x 33 m	
120106	6 mm x 33 m	1/10 pcs.
120109	9 mm x 33 m	I/ IU pcs.
120112	12 mm x 33 m	



Fine Line Striping Tape in rolls is very thin self adhesive vinyl tape for multicolor overpainting and applying parallel stripes on the surface. The blended rubberbased adhesive system offers solvent, moisture and high temperature resistance through bake cycles up to 155°C for 45 minutes. Fine Line Striping Tape is durable, easy to apply and to remove after use. It doesn't leave any residue. Service temperature range is from 0°C to 155°C.

Function: Fine Line Striping Tape is perforated into 8 stripes with 1.5 mm width and intended for multicolor overpainting and reproducing decorative strips of almost any profile by removing the necessary number of strips.

120000 2	5 mm x 10 m	1/36 pcs.

PROFI MASK MASKING PAPER

Masking Paper made of 100% pure unbleached long-fibre Kraft pulp.

Function: RADEX PROFI MASK-Masking paper is designed for masking parts of the car body which are not to be overpainted. It has a special treatment on one

side which makes this paper a paint absorbent paper and prevents water-based paints from going through it. Easy to cut and easy to apply on difficult areas. FOR PROFESSIONAL USE ONLY!

671000	0.2 x 400 m	
671001	0.4 x 400 m	
671002	0.6 x 400 m	1 roll
671003	0.9 x 400 m	
671004	1.2 x 400 m	



MASKING TAPES

Tapes are intended for masking cars during preparation and painting procedures under average and high temperatures. Doesn't leave any residue after removal from the surface.



MASKING TAPE 60 °C

Crepe paper based masking tape in roll of white color. It is resistant to solvents and temperature up to $60^{\circ}\text{C}.$

Function: tape is intended for masking cars during preparation and painting procedures under average temperatures. It doesn't leave any residue after removal from the surface.

371001	19 mm x 50 m	96 pcs.
371002	25 mm x 50 m	72 pcs.
371003	38 mm x 50 m	48 pcs.
371004	50 mm x 50 m	36 pcs.
371075	75 mm x 50 m	16 pcs.



MASKING TAPE 100 °C

Crepe paper based masking tape in roll of brown color. It is resistant to solvents, water and temperature up to 100°C.

Function: tape is intended for masking cars during preparation and painting procedures under average and high temperatures. It can be used with water-based paints and infrared heaters. Masking tape ideally sticks to the surface and doesn't leave any residue after removal.

340341	19 mm x 40 m	96 pcs.
340342	25 mm x 40 m	72 pcs.
340343	38 mm x 40 m	48 pcs.
340344	50 mm x 40 m	36 pcs.



PROFI MASKING TAPE 80 °C

High quality and a high performance RADEX PROFI masking tapes can be used not only in the professional automotive sphere but also by equipment manufacturers. Thermor esistance is up to 80°C degrees. Crepe paper in yellow color is resistant to solvent or water-based paints and any infrared heaters. Masking tape ideally sticks to the surface and doesn't leave any residue after removal.

Function: tape is intended for masking cars during preparation and painting procedures under average and high temperatures.

350151	18 mm x 50 m	48 pcs.
350152	24 mm x 50 m	36 pcs.
350153	36 mm x 50 m	**
350154	48 mm x 50 m	24 pcs.



PROFI MASKING TAPE 120 °C

Superior quality and high performance RADEX PROFI masking tapes can be used not only in the professional automotive sphere but also by equipment manufacturers. Thermo resistance is up to 129°C degrees. Crepe paper in white color is resistant to waterborne paints and any infrared heaters. Masking tape ideally sticks to the surface and doesn't leave any residue after removal.

Function: tape is intended for masking cars during preparation and painting procedures under average and high temperatures.

350351	18 mm x 50 m	48 pcs.
350352	24 mm x 50 m	36 pcs.
350353	36 mm x 50 m	24 pcs.
350354	48 mm x 50 m	24 pcs.



WASHI MASKING TAPE

RADEX Washi rice paper tape (also known as Japanese Flat Paper) is generally used for paint masking applications. This Washi paper tape does not break when peeling, but can be easily cut or torn by hand. Tape will not give adhesive residue and not change color up to 150°C for 30 minutes.

Function: recommended for car repair paint masking and to make a critical edge and mask a corner part. RADEX Washi masking tape does not leave a residue. The back side of this tape will not repel paint. This Washi tape is designed to give an excellent paint break line.

380019	19 mm x 50 m	48 pcs.
380025	25 mm x 50 m	36 pcs.



SILVER DUCT TAPE

RADEX Silver duct tape is polyethylene coated cloth backing with rubber adhesive. Duct tape with very high adhesion and excellent high or low-temperature resistance. Does not leave behind glue after removal.

Function: recommended for protecting the bodywork against sanding through paint on the near area. Ideal for holding bumpers or other spare parts after car is in an accident and vehicle transporting.

381050	50 mm x 50 m	18 pcs.



ORANGE MASKING TAPE

Very It exible masking tape ORANGE is intended for masking cars during preparation and painting procedures under average and high temperatures. It can be used with water-based paints and infrared heaters. Masking tape ideally sticks to the surface and doesn't leave any residue after removal.

370001	19 mm x 50 m	64 pcs.
370002	25 mm x 50 m	48 pcs.
370003	38 mm x 50 m	32 pcs.
370004	50 mm x 50 m	24 pcs.

PROTECTING TAPES



PAINT PROTECTOR FILM PU

OEM quality transparent protective film against chippings and scratches. Also suitable for car and bus windows. Does not yellow, prolonged resistance to UV. Resistant to high pressure cleaning.

121230	150mm x 2m	1/12 pcs.



STRUCTURE EILM

OEM quality black protective film against chippings and scratches. Also suitable for car and bus windows. Does not yellow, prolonged resistance to UV. Resistant to high pressure cleaning.

121240	150mm x 2m	1/12 pcs.



SELF ADHESIVE FILM WITH ANTI-SLIP SURFACE

Especially developed to protect the floor from paint in mixing rooms, spray booths and working table surfaces. Color-white.

ALC:	Size	rackaye
122100	600mm x 20m	1 pc.

MASKING FILM THIS SIDE UP /

The film is supplied in a roll folded in several layers. The roll height in the folded position is 1 m. Paint Absorbent Masking Film is used for masking areas which are not to be overpainted. Special surface treatments ensure excellent adhesion of paint to the film around the repair area and eliminate the need for additional paper masking, as well as the risk of paint [Yaking" or removal.





PAINT ABSORBENT MASKING FILM MF-4200

High-density transparent polyethylene film with electrostatic coating. It is resistant to a temperature up to 80°C .

RADEX logo with the sign "This side up" is printed along the centre of the film to provide an accurate positioning guide.

Art.	Size	Thickness	Package
660010	4 x 200 m		
660013	5.5 x 150 m	10 µm	1 roll
660016	6 x 100 m		
660012	4 x 5 m	7 μm	1 sheet



PURPLE MASKING FILM

A premium high density static masking film in purple color that resists moisture imprinting or ghosting on painted vehicle surfaces. High thickness allows for ease of handling and increases cling to vehicle; treated to resist primer, base and clear coat flaking.

Function: holds paint on the exterior of the film, also has a special layer on the inner side of the film to absorb humidity on the car. This way you avoid white spots after spraying. RADEX logo with the sign "This side up" is printed along the centre of the film to provide an accurate positioning quide.

660011	4 x 150 m	13 µm	1 roll



MASKING FILM CUTTER

The internal arrangement of the knife blade eliminates the chance of damage to the repaired surface. The blade is made of stainless steel.

660014	1/72 pcs.

POLISHING

One of the basic commodity groups in the RADEX range is the polishing system which is represented by polishing compounds, polishing ada, polishing cloths, abrasives, etc. Use of the RADEX polishing system effectively eliminates paint defects and defects obtained during car operation, protecting its paint for a long time with maximum gloss. The complex approach, high quality materials and simple choice of the necessary products are the main distinctive features of the RADEX polishing system. Application of the RADEX polishing system provides achieving the maximum result with the minimum effort.



ABRASIVES



RADEX GOLD MICROFINISHING ABRASIVE FILM DISCS WITH VELCRO, 15 HOLES

Microfinishing abrasive discs on plastic film base with holes for dust extraction and aluminum oxide mineral combining extremely high abrasive ability and high wear resistance.

Function: microfinishing abrasive film discs with holes are specially designed for quick defects and dust nibs removal from the painted surface. Recommended to use with universal soft interface pad and sanding equipment with dust extraction system for better finish

Art.	Size	Grit	Package
553617		P1000	
553618	- Ø 150 mm -	P1200	50/400 pcs.
553619	- mmuciw -	P1500	SU/400 pcs.
553620		P2000	

Perfect in combination with Random orbital sander [art. 420025]



MINI MICROFINISHING DISCS WITH VELCRO

RADEX Mini abrasive discs can be used for both machine and hand sanding operations and are primarily designed for spot repair. RADEX Mini abrasive discs are excellent finishing material for the correction of small painting defects and the removal of dust particles in top coats and clearcoats.

553701		P1500	
553702	Ø 35 mm	P2500	100 pcs.
553703		P3000	



WPF WATERPROOF ABRASIVE SHEETS

Waterproof abrasives sheets are made of latex paper with silicon carbide and aluminum oxide minerals, combining extremely high abrasive capability and wear

Function: waterproof abrasive sheets are intended for defects and dust nibs removal from the painted surface and can be used in such areas as OEM. Automotive Aftermarket, Wooden and Metal industries, etc.

Art.	Size	Grit	Package
	230 x 280 mm	P1500	— 50/1000 pcs.
310118	230 x 280 mm	P2000	— 50/1000 pcs.

FOAM ABRASIVE DISC

- . Backing: cloth + Sponge + Velcro
- Mineral: aluminum oxide
- · Coating: open coating

DISC, Manual sanding (WET or DRY)

- Advantage: Long lasting
- Excellent and consistent finishing Outstanding grip
- . Works well on corner surface and edge Washable





POLISHING COMPOUNDS



ONE STEP

Now you can make your polishing process more efficient and faster than before! RADEX one step polishing compound is specially designed for paint finishing work on scratch resistant surfaces including UV cured paints:

- Fast removal of blemishes
 Repairs top coats
- Repairs top coats
 Deep scratch removal
- Deep scratch removal
 Time & product economy

Time & product economy

170405 1 L 1/6 pcs.

Recommended to use with RADEX lambs wool polishing pad, art. 181500 (see "Polishing pads" section)



RDX-23

RADEX RDX-23 fine abrasive compound on aluminum oxide base is especially designed for removal of small scratches and sanding marks with grid P2000-P3000 and producing a long lastling mirror finish in one step. It can be used after RADEX RDX-10 Abrasive compound as a standard operation.

It is especially effective on dark color surfaces to remove haze, circular scratches and wholograms». The compound doesn't get dry and residue is easily cleaned up after polishing. It doesn't spill. Perfectly matches all types of paints and clear coats. It doesn't contain silicones. For professional use only!

 Shake well before use. Apply on clean and properly cured surface. Avoid using on hot surfaces and in direct sunlight.

- Ideally applied using RADEX RDE 02 yellow polishing pad on electric or pneumatic polishing machine at 2000-2500 RPM. No water needed.
- 3. Work a small area at a time with medium pressure. Reapply compound when
- moving to a new area. This will reduce consumption and increase effectiveness.

 4. Once the defects have been removed, reduce pressure and continue polishing to a bight place.
- 5. Wipe the surface with RADEX Microfiber/Ultrafiber polishing cloths.

170423	11	1/6 pcs.



RDX-10

A new generation abrasive compound on aluminum oxide base combining high abrasive effectiveness and quality finish with minimum force and time. Designed to eliminate scratches from abrasive paper P1500-P2000 or finer.

Due to the unique formulation the abrasive compound doesn't get dry and residues can be easily cleaned up after polishing. It doesn't spill. Perfectly matches all types of paints and clearcoats both fresh and aged. It doesn't contain silicones.

- Shake well before use. Apply on clean and properly cured surface. Avoid using on hot surfaces and in direct sunlight.
- Ideally applied using RADEX RDE 01 white polishing pad on electric or pneumatic polishing machine at 1500 – 2000 RPM.
- Work a small area at a time with medium pressure. Reapply compound when moving to a new area. This will reduce consumption and increase effectiveness.
- For the best result complete the process by polishing with RADEX RDX-23 polishing compound using RADEX RDE 02 yellow polishing pad.
- 5. Wipe the surface with RADEX Microfiber/Ultrafiber polishing cloths.

170410	1 L	1/6 pcs.



PROTECTIVE GLAZE GLOSS PROTECTIVE POLISH

RADEX PG is a gloss protective polish with natural carnauba wax which in combination with polymeric promoters creates a heavy-duty film on a car surface adding high gloss and long term protection against the environment. Perfectly matches all types of paints and clearcoats.

Instruction for use:

- Shake well before use. Apply on clean and properly cured surface. Avoid using on hot surfaces and in direct sunlight.
- Ideally applied using RADEX RDE 03 black polishing pad on electric or pneumatic polishing machine at 2500-3500 RPM. Can be used manually with RADEX Polishing Clath. No water needed.
- Wait 1-3 minutes until the polish gets slightly dry and wipe away residue using RADEX Microfiber/Ultrafiber polishing cloths.

170404	1 L	1/6 pcs.



ANTIHOLOGRAM COMPOUND

RADEX antihologram compound is a very fine paste which removes swirl marks, blooms and holograms, especially on dark paintworks.

The extremely fine nano-particles guarantee an outstanding final finish with an unmatched deep gloss.

The cut intensity can be regulated by using different polishing pads and polishing speeds.

170406	11.	1/6 pcs.



EXTREME CUT

The High Performance Cutling Compound Extreme Cut has been designed specifically for paint finishing work on scoatch resistant surfaces, including IV cure of paints. The outstanding cut, the brilliant mirror- like gless and easy handling of product will comince you. Sart using the polishing machine at 8000PM and finish of at 1200 RPM. Easy to be wiped off afterwards with a microfibre cloth. Suitable for all kind of paints conventional IX, X East all, all close rects, including cereamic clean costs Stillone free.

170451	1 kg	1/6 pcs.



CRYSTAL CLEAN

RADEX Crystal Clean guarantees fast and easy cleaning of the clear coat. It is perfect for controlling the surface after polishing, to check and ensure that all sanding marks have been totally removed. Suitable for all paints, including hard and scratch resistant clear coats. Works on fresh or cured automotive paint surfaces. Silicone free. No filter.

Art.	Volume	Package
170407	500 ml	1/6 pcs.

POLISHING PADS



POLISHING PADS

<u> </u>	Art.	Name	Size	Package
	181410	RDE 01 White plain polishing pad for abrasive compound		
	181411	RDE 02 Yellow plain polishing pad for Fine abrasive compound	Ø 150 mm, 25 mm thickness	2 pcs.
	181412	RDE 03 Black plain polishing pad		



181660	Blue	Ø 165mm.	
181661	Orange	25mm	1/10 pcs.
181662	Black	thickness	

181665	Cutting	Ø 140mm,	
181666	Polishing	25mm	1/10 pcs.
181667	Finishing	thickness	
-			



CCS TYPE POLISHING PADS

RADEX CCS type precision rotary pads are designed exclusively for use on Rotary Machines. The Precision Rotary Ine introduces an updated profile to maximize performance, durability, flexibility, and accuracy during polishing, Unlike conventional foam pads that ont of abost polishin tog uickly, diminishing polish and pad performance, CCS-type pads address this common issue through strategic actions of partialty lossed foam cells.

, -	181611	cutting	yellow		
١ -	181612	polishing	orange	Ø 165 mm	1 pc.
, -	181613	finishing	black		



RDE MINI POLISHING PAD

Waffled structure for more efficient polishing result. For polishing abrasive compounds (such as RDX-10, RDX-23). RDE MINI pad is ideal for polishing difficult to access surfaces on car body.

x 30 mm 1/100 p	cs.
	x 30 mm 1/100 p





RADEX (ambs wood polishing pads offer the ultimate quality and performance hit is top quality (ambs wood cuts quicker than a form pad, and last longer. The heat absorbing characteristics of wool fibres greatly reduces the amount of heat generated during machine polishing, allowing defects to be eliminated quicker. Function, velcro hook: It backing pad, the lambs wool can be washed and reused Recommended for using with RADEX one sites padsigned commended for the sites of th

181500	Medium	Ø 150 mm	
181502	Soft	Ø 150 mm	1/10 pcs.
181501		Ø 80 mm	1/5 pcs.
181600	Purple hybrid	Ø 165mm	1/10pcs.
181659	Purple hybrid	Ø 152mm	1/10pcs.
181601	Premium	Ø 165mm	1/10pcs.
181602	Twisted	Ø 165mm	1/10pcs.
181688	Double side	Ø 203mm	1/40pcs.



In combination with Small shaft grinding M14 Female 5/8"-1" Art, 500560 Package 1pc.



MICROFIBER POLISHING PADS

RADEX microfiber polishing pads are made using specific blends of microfiber and special bonding materials, ensuring durability and long-lasting performance that is hard to compete with. They provide outstanding finishing capability, resulting in a luster free of haze. Quality foams provide greater durability with density onlined for each and is intended outmose.

Function: hook-it backing pads, with the cutting power and finesse to tackle any task, using a dual action polisher.

181656		Ø 82 mm	
181657	cutting	Ø 133 mm	1/10 pcs.
181658		Ø 159 mm	



ECO POLISHING PADS FOR M14 THREAD

RADEX ECO 150 mm polishing pads fits a range of RADEX polishing accessories to achieve an ideal polished finish. Made from high quality foam which has a high durability to provide a lono life soan.

Function: Can be used with any rotary polishers. Ideal for use with most brands on the market as the majority of threaded polishers use a [M14] 14mm thread.

ALC:		COLO	3126	rackage
181301	hard	white		
181302	medium	orange	Ø 150 mm	1/10 pcs.
191202	coft	black		

POLISHING CLOTHS



DISPOSABLE POLISHING CLOTH

Nonwoven disposable polishing cloth of white color with porous structure made of polyester and rayon. It is supplied in the perforated roll which is placed in special disponser box for convenience in using and storing.

Function: nonwoven disposable polishing cloth is intended for removal of polishing compound residue. It is floxible, lint free, gathers and keeps particles very well, antistatic and doesn't damage the surface.

Art.	Size	Package
160401	32 x 40 cm	250 pcs. in roll



MICROFIBER POLISHING CLOTHES

Soft wowen reusable microfiber polishing cloths in green/blue/yellow colors, made of a polysets and polyamide mikror. Different colors allows to easy granize the working environment. These cloths are silicone-free, making them suitable for professional car repair. They beast remarkable basoprision and efficient cleaning ability. Durable to chemicals, long-lasting, and can be washed at temperatures up to 95°C.

Function: These super-soft woven reusable microfiber polishing cloths are designed for removing polishing compound residue from painted surfaces. They are also suitable for cleaning windows, decorative wooden parts, and leather. Flexible, lint-free, they gather and retain particles effectively without causing damage to the

160410	blue		
160411	green	40 x 40 cm	5 pcs.
160414	vellow	_	



SUPERFIBER

This professional cloth meets the highest requirements in paintwork care, delivering exceptional results even on large and sensitive surfaces. Leaves no residues, no wipes in scratches. Extremely soft and absorbent. Recommended for final cleaning with RADEX Crystal Clean [art.170407].

160412	50 x 60 cm	1 pc.



PREMIUM

Premium blue edgless cloth. The finest, edgless professional quality microfiber detailing cloth that is extremely soft and perfoct for safe cleaning and dirt removal. These microfiber towels can tackle any car cleaning task and work equally well on interior, exterior, wheels, trim and paint.

160413	40 x 40 cm	1/10 pcs.



NATURAL

100% genuine natural chamois leather: soft, high extensibility, hygroscopicity, permeability, unique design, absorbs large amounts of water. Leaves surface lint and stroak free. Easy to wring out and store.

681101	61 x 40 cm	5 pcs.

SEALANTS AND ADHESIVES

High quality adhesives and sealants in our product range.
Now glued and sealed seams and parts looks like OEM made.







POLYURETHANE SEALANT RADEX 701

RADEX 701 polyurethane sealant is a one-component, very fast curing, and elastic polyurethane adhesive/sealant designed for car body sealing which cures on exposure to atmospheric moisture. Specifically developed to meet the car industry requirements, it is characterised by an initial controlled viscosity that makes the product easy to brush and to smooth, particularly in those applications where a thin layer or bead of adhesive is required. Once cured, the products reach high levels of hardness that gives a first equipment appearance to the material

sage: before application, refer to the instructions contained in the Technical and afety Material Data Sheet.				
220701		white		
220702	310 ml	grey	1/12 pcs.	
220703		black		

for sealant, (see "Equipment" section

Perfect in combination with RADEX HCG or PG guns GLAZING ADHESIVE RADEX 801

RADEX 801 Glazing adhesive is a one-component, ultra fast-curing (short Drive Away Time), flexible and high modulus polyurethane adhesive for the bonding of vehicle glass-direct glazing. It is specifically designed to give a fast and safe driveaway time on vehicles fitted with airbags. It is ideal for direct glazing on vehicles where High Shear Modulus and Non Conductive properties are required. Solvent free, it is completely odourless.

Usage: the surfaces to be treated should be perfectly clean, dry and free from dust and grease. It is necessary to apply RADEX Cleaner/Activator and RADEX Primer on plass.

220801	310 ml	1/12 pcs.

Perfect in combination with RADEX HCG or PG guns for sealant, [see "Equipment" section]

SPRAYABLE SEALANT RADEX 901

RADEX 901 Sprayable sealant is a low viscosity, Silyl-Terminated sealant which cures by moisture reaction to form an elastic coating. It is isocyanate, phtalates, PVC and silicone free. Specific for spray applications or by paintbrush for sealing seam and welded joints in the automotive industry and in the construction and repair of coaches and car-bodies, railway carriages, industrial vehicles and containers, it also contributes towards protection against corrosion. Excellent primerless adhesion properties to metals, painted surfaces, aluminium, PVC, plassfiber reinforced plastic, ABS, polycarbonate and plastic materials in general fexcluding polyethilene

Usage: before application, refer to the instructions contained in the Technical and Safety Material Data Sheet

220901	grey		
220902	black	290 ml	1/12 pcs.
220903	beige		

Perfect in combination with RADEX PGS or PG ouns for sealant application (See "Equipment" section).



2K FPOXY STRUCTURAL BONDING

Radex® 225 2K Epoxy is a unique epoxy created for bonding and repairing various materials. This product boasts zero shrinkage and is excellent for grinding. Applied with the RADEX HSG or HCG hand gun at a mixing ratio of 2:1, it can be cured using the IR heater at 60°C. RADEX 2k-Epoxy is a versatile system for repairing, bonding, and sealing metal, as well as other materials like stone, SMC, ABS, aluminum, galvanized steel, cold-rolled steel, and hot-rolled steel. Its advantages include being a leadfree alternative to tin soldering, requiring no open flame. It provides perfect sag resistance, rebuilds the original shape effectively, exhibits excellent curing speed, robust bond strength, and remains flexible even under cooler conditions with no shrinkage.

Art.	Volume	Package
220225	195ml	1/12 pcs.

2K POLYURETHANE STRUCTURAL ADHESIVE 30 SEC

Radex® 2K polyurethane structural adhesive 30 sec is a 2K product with very fast drying time for plastic repair. With mixing tips included in the set it is easy to mix both components without air bubbles and waste of the material. Product can be used on different kinds of plastics, wood, metal, plass fiber and ceramics.

Application: Clean and degrease surface. Working time 30 sec. Sanding time after 5 min. Structural adhesive is in 1:1 50 ml cartridge which is used with art. 410033 RADEX PRO hand gun.

220000	50 ml	1/12 pcs.



2K PLASTIC STRUCTURAL ADHESIVE 1.5 MIN

Radex® 2K plastic structural adhesive 1.5 min is a 2K product with fast drying time for plastic repair. With mixing tips included in the set it is easy to mix both components, without air hubbles and waste of the material. Product can be used on different kinds of plastics, wood, metal, glass fiber and ceramics.

Application: Clean and degrease surface, Working time 1.5 min. Sanding time after 10 min. Structural adhesive is in 1:1 50 ml cartridge which is used with art. 410033 RADEX PRO hand gun.

220090	50 ml	1/12 ncs	

MIX TIP FOR 2K STRUCTURAL PLASTIC ADHESIVE

It's the shortest mix tip for 2 component adhesives in the world, 100% mixing of 2 component adhesives with minimum wasted material. Fits all 50ml cartridges with bayonet closure. Shorter than comparable mixers, for easier access to work,

Art.	Package
220005	1/12 pcs.









PLASTIC ADHESIVE PRIMER AERO

Primer is a compound for the preparation of plastic surfaces, made of resins dispersed in solvents. Product improves the adhesion of structural adhesives on thermonlastic materials such as PMM SAN AS P.P. PA TRILL PVC CA

Applications Shake well before use. Spray a thin layer of primer directly on to the repeared parts, keeping the aerose lin a vertical position. The product favours a subsequent effective adhesion of paints, glue and inks. Apply in strictly necessary quantities to avoid ripping and waste of product. What for at least 5 min at 23 °C before applying the adhesive. To avoid problems of incompatibility, we recomend to use the complete product range of the RADEX system for the repair of plastic

220111	200 ml	1/6 pcs.



PRIMER

RADEX Primer is a black Primer specifically designed for the ceramic band on whice glass. It ensures the complete protection of the adhesive by creating a barrier against harmful UV rays which can lead to the degradation of the adhesive. It is also an adhesion promoter, To be used in conjunction with RADEX Cleaner/Activator.

220001	30 ml	25 pcs.



CLEANER/ACTIVATOR

RADEX Cleaner/Activator is a surface Cleaner/Activator to be used in direct glazing applications. It is used to clean windshields and, at the same time, to prepare them for the following step in which the RADEX Primer will be applied. Being sitane based it is a non filming resin that also works as a preliminary adhesion promoter, enhancing the bonding orgore (ties of the adhesive).

	Volume	Package
220002	30 ml	25 pcs.



FELT APPLICATOR

Applicator specifically designed for the application of Primer and Cleaner/Activator
The applicator can absorb and retain more of the primer, saving time and energy,





WIRE Art. Section Package 040625 twisted 1 pc.

PROTECTIVE COMPOUNDS









OVERPAINTABLE ANTICHIP COATING 310 SP

Overpaintable antichip coating made of synthetic rubber and resins. It is being produced in black, grey and white colors. It has good mechanical strength, excellent rust preventive and sound absorbing properties. Cures fast forming structured protective coating that can be overpainted with all types of 1K and 2K paints.

Function: overpaintable antichip coating is intended for rust and stone chip protection of car bodies, railway wagons, etc. This coating was especially designed to restore textured OEM finishes under bodyshop conditions. Depending on the method of spraying it is easy to achieve different type of structured finish on the surface

Art.	Volume	Color	Package
260011		black	
260012		grey	1/12 pcs.
260013		white	_
Perfect in combination	on with antichip spr	ay guns 🥻	T Street

UNDERBODY COATING 210 UBC



Non overpaintable coating made of bitumen. It is being produced in black color. It has good mechanical strength, excellent rust preventive and sound absorbing properties. Cures fast forming flexible structured protective coating without runs which is similar to OEM appearance.

Function: non overpaintable bitumen coating is intended for rust and stone chip protection of car underbody, body sills, wheel arches, wings, etc. Depending on the method of spraying it is easy to achieve different type of structured finish on the

260021	11.	black	1/12 pcs.
Perfect in combinatio RADEX 410010 and 41			

BRUSHABLE SEAM SEALER RADEXSEAL BS

Overpaintable one component brushable seam sealer made of synthetic rubber. It is easy to apply. It cures fast forming flexible structured coating without runs which is similar to OEM appearance. Brushable seam sealer has good mechanical strength, excellent rust preventive and sound absorbing properties. It has perfect resistance to water, oil, gasoline, etc

Function: brushable seam sealer is intended for applying on spot welded seams or on bolted joints for providing excellent leak and water resistance.

210027	1 kg	grey	1/12 pcs.

Perfect in combination with RADEX flat pylon brush 681114 [see "Accessories" section



INNER CAVITY WAX 110 ML



Non overpaintable transparent flexible coating made of wax. It has excellent rust preventive properties. Due to high penetrating power inner cavity wax perfectly displaces water and can be applied even to wet surfaces. After curing the coating remains slightly sticky and flexible without a specific smell.

Art.	Volume	Color	Package	ı
260031	11.	transparent/white	1/12 pcs.	ľ

Perfect in combination with universal antichip spray gun RADEX 410012 (see "Equipment" section).



RECOMMENDATIONS:



minutes







25-30 cm

25-30 cm





60 °C 3 h/20 °C

between 4-6 h/20 °C

90-120 mir





























GLUING TAPES

mountings, etc. are excluded. Surfaces remain intact and the joint line between the connected parts is almost invisible. RADEX double-sided tapes consist of two adhesive layers, foam carrier and protective liner. The foam carrier provides the tape with the ability to take the shape characteristics as well as adhesive performance in a wide range of temperatures. The assortment of RADEX double-sided adhesive tapes includes various combinations of special rubber and acrylic glues with different foams like polyurethane. polyethylene, acryl and various elastomers.



DOUBLE-SIDED HIGH STRENGTH ACRYLIC HSA TAPE

Double-sided mounting adhesive tape of red color based on acryl carrier. It is supplied in a roll. It is resistant to gasoline, oils, lubricants, solvents, UV, moisture and temperature up to 120°C. It also has high weer and stiding resistance.

Function double-sided acrylic tape is a durable way for assembling and vibrationproof bonding of time, body side moddings, signs, etc., on car body, it exceeds adhesion strength of double-sided tape with polyhythylene carrier. Temperature of use should be in a range from 1975 to 40°D. Clasen be surface from dust surface Stick double-sided acrylic tape to a surface with pressure as it is resided with the other surface of the surface with pressure as it is resided with the other surface and the surface with great surface with great surface.

110006	6 mm x 10 m			
110009	9 mm x 10 m			
110012	12 mm x 10 m	0.8 mm	1/10 pcs.	
110019	19 mm x 10 m			
110025	25 mm x 10 m			



DOUBLE-SIDED MOUNTING ADHESIVE DSA TAPE

Double-sided mounting athesise tape of black color based on polymylane currier it is supplied in a roll. It resistant to gostion is, solvents, IV and removature up to 120°C. Function double-sided athesive tape is a durable and cost-affective way for assembling and visitants proof bending of time, body side modifice, signs, etc. or body, Temperature of use should be in a range from 15°C to 3°D°C. Clean the sortice from duta of dirt. Side double-sided mounting athesive tape to a surface with pressure as it is treated with the pressure sensitive athesive. The indicated level of performance will be reached after a bonding period of 24 hours at 22°C.

110109	9 mm x 10 m	0.95 mm	1/10 pcs.
	12 mm x 10 m		
110119	19 mm x 10 m	ir to pes.	
110125	25 mm x 10 m		



TRANSPARENT DOUBLE-SIDED ULTRA MOUNTING ADHESIVE UMA TAPE

Transparent thin double-sided ultra mounting adhesive tape based on polyester carrier. It is supplied in a roll. It is resistant to gasoline, oils, solvents, UV, moisture and temperature up to 120°C.

Function, transparent double-sided ultra mounting adhesive type is a durable way for assembling and type the part of the properties of the

110212	12 mm x 25 m		1/10 pcs.
110219	19 mm x 25 m	0.2 mm	I/IU pcs.



LOGO TAPE

Permanent adhesion after 24 hours

Innovative glue strip for the replacement of emblems on vehicles after damage. The best time saving alternative to the repurchase of emblems.

Specification: car wash resistant. Temperature resistance: -40°C to +90°C.

RECOMMENDATIONS ON THE USE OF DOUBLE-SIDED ADHESIVE TAPES HSA, DSA AND UMA:

Tapes should be used at a temperature of +15°C to +30°C.

It is necessary to clean the surface from dust and dirt.

Sticking the tape by pressing the surface, as a pressure sensitive adhesive applied to it.

Stated tape performance achieved 24 hours after bonding to the surface and at 23°C.







PAINT STRAINERS

Paint strainers are disposable paper filters with 125 or 190 micron nyton mesh. The give is applied to the exterior surface in laminating the nyton mesh to the paper. No direct contact between the solvent and the give, thus avoiding any possibility of contamination of the base/(car bring strained. All imprintings done on the solvent strainers are sufficiently as the solvent strainers of the solvent strainers are solvent as the solvent strength in the solvent strainers of the strainers by 2 to 3 lines, idepending on the solvent strength. Note mesh has equal call to that make the filtering process ideal.

Function: disposable paint strainers are intended for filtering any types of paint. 125 micron strainers are used for water-based paint filtration. 190 micron strainers are used for solvent based paint filtration.

360001	125 micron	250/1000 pcs.
	200	200/1000 pcs.



RADEX SHAKING CUPS WITH LIDS FOR PAINT, ETC.

Shaking cups with lids. Also are suitable for storing any WB or solvent liquids.

Each cup is supplied with an air light sealing lid that allows to store and transport ready mixed paints and other liquids.

620155	155 ml	1110 pcs.
620280	280 ml	432 pcs.
620365	365 ml	415 pcs.
620565	565 ml	290 pcs.
621180	1180 ml	170 pcs.
622000	2000 ml	84 pcs.



SPRAY SAMPLE METAL PLATE

Primed spray sample metal plates with black line

Function; primed spray sample metal plates are intended for paint color matching and paint coverage control. Used for both solvent and water-based paints. On the back idde of the plates a space is provided for making notes about paint article number, etc. There is a hole in the plates for convenience of storing, Spray sample metal plates allow to collect personal database of colors and shades.

680000		light grey	
680001	105 x 150 mm	white	100/1000 pcs.
490002		dark grey	•



RADEX PREMIUM MIX CUPS AND LIDS

Disposable transparent paint mixing cups with lids for paint preparation made of polypropylene. Cups and lids are solvent resistant, material is not degradable. Cups have clearly printed mixing ratios.

Function disposable cups are intended for paint preparation according to the following basic ratios: 21, 3:1, 4:1, 5:1 with ability to add thinners 10, 15, 20, 25 % for each ratio taken. Cups can be supplied with lids to protect the paint.

620385	385 ml	
620750	750 ml	200 pcs.
621400	1400 ml	
622300	2300 ml	100 pcs.
630385	385 ml	
630750	750 ml	200 pcs.
631400	1400 ml	
632300	2300 ml	100 pcs.
	620385 620750 621400 622300 630385 630750	6-20385 385 mt 6-20750 750 mt 6-21400 1400 mt 6-22300 2300 mt 6-30385 385 mt 6-30750 750 mt 6-31400 1400 mt



PLASTIC NOZZLE

Plastic nozzles for sealants and adhesives in cartridges and tubes. Threated 15 x 1.5 mm.

410050	15 x 1,5 mm	100 pcs.



RADEX PRO pressure sprayer: the manual sprayer is a large bottle intended for work with any antisticone cleaner. It is steady against all kinds of solvents.

681000	11.	1 pc.



TOUCH-UP BOTTLES

Touch-up bottles are in polyester transparent plastic, externally graduated. Suitable for spot repairs and retouch. Easily fillable thanks to the large opening. The package includes a metal ball for precise color mixing.

681107	50 ml	60 pcs.	



SELF-ADHESIVE HOOKIT MATERIAL IN A ROLL

To apply on worn pads or handblocks as replacement and increase the pad's life.

681102	1.45 x 1 m	1 pc.



WHITE RUBBER TROWEL

Highly flexible rubber trowel for creating complex shapes. Easy to wash and care

after use.		
681005	10 x 7 x 0.5 cm	1/24 pcs.



PAINT MIXING AND CAN OPENING STICK

Metal stick is made for paint product mixing and opening metal cans. Tool is perfect for 1L and 4L cans. They have plastic handle for easy use.

681109	10 pcs.



MICROBRUSH

Mini brush suitable for paint retouch, in dust-saving package of 100 pcs.

681108	100 pcs.



FLAT NYLON BRUSH

Brush with nylon bristles recommended for the application of masses, bitumen-based products and synthetic resin-based products - RADEX SEAL BS, etc.

681114	25 mm	12 nce	



FILLING KNIFE SET 4 PCS

The form filling knives allow to put a thin layer, especially when regenerative or repair work demands absolute accuracy.

681002	1/60 sets

RADEX

R.C.S

RADEX CUP SYSTEM

ADVANTAGES

- Easy to use
- Fewer components
- @ Secure system to use
- Stable paint flow @ Easy to add paint during
- the painting process Substantial saving on spray gun cleaning
- liquids and thinners Minimal investment to start painting
- No need for separate dosing cups for accurate paint mixing materials (RTS)
- One system for full painting cycle. from mixing, filtration to paint storing
- Faster painting process



CUP

750750	750ml	in box 50 pcs.
950950	950ml	in box 50 pcs.





	750130	with 130 µ filter for 750ml cups	50 pcs.
_	950130	for 950ml cups	50 pcs.
	750190	with 190 µ filter for 750ml cups	50 pcs.
	950190	for 950ml cups	50 pcs.

SMALL LID

50/4000 pcs



750755	for 750ml cups	100 pcs.
950955	for 950ml cups	100 pcs.





750001 [M16x1,5] Male thread



















750006 (M18x1.5) Female thread

EQUIPMENT



Wide range of RADEX professional equipment in ergonomic design for applying antichip and anticorrosion coatings, sealants and glues allows to spread these materials quickly and well. Easy-to-work equipment becomes an irreplaceable tool in any bodyshop. All presented equipment operates with high efficiency and





AGR ANTICHIP SPRAY GUN WITH AD JUSTARI F

Professional gun with adjustable nozzle intended for applying antichip coatings

Adjustable nozzle for reproducing textured coating structure

- of any thickness and difficulty
- Ability to use with 1L and 2L cans Ability to use with water-based paints
- Material: Diecast aluminum and forged brass
- Working pressure: 3-6 Bar
 - Approximate air consumption: 150-200 (\min

Net weight: 534 g	

410010	1 pc.

AG ANTICHIP SPRAY GUN

Spray gun intended for applying antichip coatings from 1L and 2L cans

- . Ability to use with 1L and 2L cans Ability to use with water-based paints
- Technical characteristics:
- Material: Diecast aluminum and forged brass
- Working pressure: 3-6 Bar Approximate air consumption: 150-200 (\min
- Net weight: 400 g

410011	1 pc.



AGU UNIVERSAL ANTICHIP SPRAY GUN

Universal antichip spray gun intended for applying antichip coatings, bitumen underbody coatings and inner cavity waxes from 1L and 2L cans.

. Ability to use with 1L and 2L cans Ability to use with water-based paints

Supplied with 500 mm plastic tube of Ø10 mm and special nozzle for 360° spraying in hard to reach places.

Technical characteristics:

- Material: Die-cast aluminum and forged brass Working pressure: 3-6 Bar
- Approximate air consumption: 150-200 (\min.)
- Net weight: 554 a

HSG STANDARD HAND GUN FOR ADHESIVES AND SEALANTS

Manually-operated our intended for applying sealants and glues in standard 310 ml plastic or aluminum cartridges.



- Reliable construction Intended for 310 ml cartridges
- No need of compressed air
- Easy use and handling Reasonable price

Technical characteristics:

Material: Gun body and the trigger: Die-cast aluminum, Cartridge holder: Steel Net weight: 760 a

(10001	1

HCG HAND GUN FOR ADHESIVES AND SEALANTS IN CARTRIDGES AND TUBES

Professional manually-operating our intended for applying sealants and glues in standard 310 ml plastic or aluminum cartridges or standard 300 ml and 400 ml bags.

- Reliable construction . Intended for 310 ml cartridges and tubes
- · No need of compressed air
- · Easy use and handling
- . Material: Gun body and the tube: Die-cast aluminum. Ring nuts: Special plastic
- Net weight: 780 g

410022	1 pc.





PG PNEUMATIC GUN FOR SEALANTS

Professional universal pneumatic gun intended for applying sealants and glues in standard 310 ml plastic or aluminum cartridges or standard 300 ml and 400 ml bags.

- Equipped with pressure regulator . Equipped with pressure release valve
- Intended for cartridges and tubes
- Tube length 370 mm · Perfectly balanced
- . Ergonomic handgrip made of solvent resistant plastic
- . The piston's special cone design ensures a minimal amount of product waste
- Technical characteristics: Material: Gun body: Anodized aluminum. Handgrip: Plastic
- Working pressure: 6-10 Bar Approximate air consumption: 150-200 (\min
- Net weight: 1225 g

410031	1 pc.



Professional universal pneumatic gun intended for applying sealants and glues as well as sprayable sealants packed in standard 310 ml plastic or aluminum cartridges

- For plastic or aluminum cartridges
- . No overspray due to innovative spraying system . Thanks to the gun's hermetic lock there is no need to disconnect the cartridge
- Universal our for extruding and spraying operations
- . Special treatment of the gun avoids material sticking
- Technical characteristics:
- . Material: Drop-forged brass nickel-plated . Working pressure: 3-5 Bar
- Approximate air consumption: 200-300 (\min
- Nozzle size: 1.6 mm Net weight: 1038 g

410032	1 pc.

DJ GUN FOR W/B PAINT DRYING

Accelerated drying of surfaces painted with water-based materials. Reduced cycle times in the spray booths. Low investment cost and easy

400000	1 pc.



PRO BLOWING GUN

Professional blowing gun with pressure stabilizer, progressive adjustment of the airflow 30° curved 90 mm

400093	1 pc.




PRO APPLICATOR FOR GLUES AND ADHESIVES

Professional handle gun to apply and extrude adhesives and glues contained in standard 25+25 two-component cartridges.

- Technical characteristics: Plastic cradle & metal body
- Mixing ratio 1:1 Weight 430 g







- A needles + bandle · Several special brushes + handle
- · Paint gun lube, etc





SANDING HAND BLOCKS

RADEX cupplies to the market different types of abrasive materials both with and without holes made procisely according to a dishperiod configuration of back up pads and hand blocks. The most cost-effective revenion is the one without dust extraction. However, most advanced are hand blocks with dust extraction, and unlike similar products, the design of these tools is optimized for the productivity of ARDEX sharsive interface. ARDEX hand blocks have an absolutely fill a working surface for fastening abrasive sheets and an ergonomic design that provides an ideally accessed with a read a shall here of incremented further without the contraction.



SANDING HAND BLOCKS WITHOUT DUST EXTRACTION

Hand tools for dry sandling without dust extraction are suitable for any type of surface. Exceptional functionality, absolutely flat working surface, high quality materials, special ergonomic, rubber grip and exclusive design are the most striking features of RADEX sandling hand blocks without dust extraction. Attaching the sandling apper in sheets to the hand blocks is carried out by means of Velcro

Function: hand tools for dry sanding without dust extraction suitable for any

-,,		
500125	70 x 125 mm (small)	
500198	70 x 198 mm [medium]	
500400	70 x 400 mm (long)	

SANDING HAND BLOCKS WITH DUST EXTRACTION

Hand tools for dry andning with dust extraction suitable for any type of surface. Exceptional functionality, aboutsely the working surface, but plus quality materials, special regionality, inablest girs and exclusive design are the most striking behaves of which the plus of which dust extra design behavior as which we have a plus of the discussion of and body and the plus of the the plus of the

Function: hand tools for dry sanding with dust extraction suitable for any type of surface with the use of abrasive paper sheets with holes.

			Package
600125	70 x 125 mm (small)		
600198	70 x 198 mm (medium)	multihole	
600400	70 x 400 mm (long)		



Flowyhard tools for dry sanding with and WID dost extraction suitable for any type of surface. Exceptional functionally, absolutely filt are recipient as the surface of th

Function: suitable for any types of surfaces with the use of abrasive paper sheets with holes. According to the sanding surface, angle can be adjusted and changed as needed.

500401		multihole	
E00/03	70x400 mm		1 pc.





HOSE FOR DUST EXTRACTION

Flexible, light and convenient 4 meter plastic hose with high wear resistance for connecting the hand blocks with dust extraction to vacuum cleaner.

Function: hose is intended to use with hand blocks with dust extraction for quick and high-quality dust removal.

600001	4 m, Ø 21 mm	1 pc.









Hand tool kit for dry sanding with abrasive discs and dust extraction suitable for any type of surface. Kit includes 3 adapters [1 flat, 1 concave and 1 convex] all with Mutti Holes pattern. Suitable for all the paper discs and net discs, 1 air regulator valve, 1 hose adapter diam. 29 mm and 1 main handle in grey color.

Specification: attaching the sanding paper in sheets or discs to the hand blocks is carried out by means of Velcro system. For dust extraction purposes in the hand blocks there is a special hole for connection with vacuum cleaner.

600150	1 pc.



KIT SANDING BLOCK WITH 3 CHANGING BACKINGS + ADAPTER

PU hand-block is characterized by an anatomic self-gripping handle. Suitable for sanding small surfaces or difficult areas.

681113	1 pc.



SANDING BLOCK FOR Ø 150MM DISCS

Manual PU sanding-block, to use with self-gripping abrasive discs in Ø 150 mm.

681112	1 pc.

DISPENSERS AND HOLDERS



ROTATING PANEL STAND

A rotating panel stand for 6 spare parts is designed for the busy painter. This panel stand will take any panel from a wing through to a large bonnet. Simply mount the panel not the four fully adjustable hooks and then let the stand take the weight of the panel and do the rest for you.

660050	202 x 85 cm	1 pc.



X-TRESTLE WITH BUMPER SUPPORTS

For holding bumpers and doors, for either preparation or painting. Treatle is galvanized and has a metal axis locking system and two bumper supports. Highly durable for heavy work. Adjustable working height. Equipped with rubber buffers. Can be used on any floor surface.

		Package
660060	128 x 60 cm	1 pc.



UNIVERSAL PAINT RACK ULS

A mobile stand designed for painting bumpers, spoilers and other smaller parts of the car body.

660095 100 - 200 cm x 110 - 190 cm 1 pc.			
	660095	100 - 200 cm x 110 - 190 cm (regulated)	1 pc.



CLASSIC TRESTLE

Very heavy duty workshop trestle that can be folded up once the job is done. Hundreds of uses and is an absolutely essential piece of kit for every bodyshop. The sled type feet make it very sturdy and stable and allows to slide it over the grids in ovens with no problem.

660070	115 x 98 cm	1 pc.





RADEX universal rotating panelstand - panelmaster. Simple to use and very versatile. This stand will handle doors, tailgates, bonnets and wings. Large 200mm rubber tyres can operate over spraybooth grids and workshop floors easily.

90 x 90-140 cm (regulated)	1 pc.



DISPENSER FOR MASKING PAPER

Four roll dispenser accepts rolls up to 120cm and features storage trav underneath dispenser unit. Very stable construction. Due to the specially designed knives, it is very easy to cut paper rolls. Paper Trolley is optimized for fast masking work on all kind of areas which are supposed to be covered and protected against paint mist. Size 150 x 128cm

Art.	Rolls	Package
660080	4+1	
660083	3	
660085	5	



DISPENSER FOR MASKING FILM

Trolley for masking film roll is a mobile dispenser, for RADEX masking film or any other films. RADEX dispenser is optimized for fast masking work and is suitable to mask vehicles comfortably by only one single operator.

660100 113 x 82 cm	pc.





DISPENSERS FOR PAPER

RADEX dispensers for different kinds of papers and towels. Tearing element helps to block the roll in the right position and tear off one or more cloths. Very stable constructions.

660120	stand 55 x 92 cm	
660130	wall	1 pc.



SPRAY GUN AND FILTER HOLDER

RADEX spray gun stand incorporating a paint filter holder for easy filling of spray gun whilst filtering paint. Works with most popular sizes of spray guns and cups. Wall or bench mount.

660110	9 x 19 cm	1 pc.



SPRAY GUN HOLDER WITH MAGNET

Holder is made of metal with a magnet mount, which allows quickly and simply attach it to the walls of the spraybooth. Designed to hold two spray guns.

681110	1 pc.

PRODUCTS FOR SPRAY BOOTH



NO DUST

New RADEX NO DUST anti dust cabine protect liquid, volume 5L

- The basic advantages of RADEX NO DUST:
 Economy (+ 11 m²/L)
- Long term anti dust protection
- Long term anti dust protecti
 Easy to wash off
- Termo resistance up to 90°C

 Art. Volume

Art.	Volume	Package
700000	5 L	1 pc.



CEILING FILTER

High quality diffusion filter media, made from 100% branded polyester fibre and progressively structured with reinforced backing. RADEX ceiling filter corresponds to FS/EUS filtration efficiency class.

Art.	Size	Package
360650	2 x 20 m	roll



PAINT ARRESTOR

For paint overspray removal we offer monofilament glassfibre media with progressive structure and laminate backing on air leaving side, making the product rigid and stable. This filter also protects equipment and environment from paint contamination. General use – spray booth floors.

360065	0.65 x 20 m	
360075	0.75 x 20 m	

HEADLIGHT RESTORATION



HEADLIGHT RESTORATION KIT

Headlight Restoration KIT is an immovative system that allows restoring the sunturned headlights, giving them the original exist and brightness and perfect limits in a very last and economical way, to make the headlights brightness and more perfect, read the instructions, given with kit, carefully. The product should not be exposed to the sun-the restoration work must be done indoors.

433000	1 pc.	



HEADLIGHT RESTORATION LIQUID

RADEX Headlight restoration liquid is a polymeric liquid whose vapor, at appropriate temperature, allows to restore the sunburned headlights, quickly replacing the original gloss and giving a perfect finish. Fast drying. Very easy To apply. High gloss. Ideal for application in polyarcheset headliams.

Application Wigo the surface of the headilghts with a clean cloth localist the boundary come with making paper and point beginning to the surface of the paper and point paper. Depending unthe damage at headilghts, can the following positioners. Beginning the paper and point paper and p

433001	600 ml	1/6 pcs.







RANDOM ORBITAL SANDER 150 MM PAD

Pneumatic sander has a dust extraction system and superior handling due to low weight. Patented drive system. Low level of vibration. Speeds up to 10,000 rpm. The machine is equipped with dust bag.

_	420050	5 mm	- 15	
_	420025	2.5 mm	- 15	1 pc.



2-HAND RANDOM ORBITAL SANDER 150 MM PAD

This pneumatic orbital grinder is designed to create a precise surface shape by grinding a putty or filling primer. An additional handle can be added to the body of the grinder on both the right and left side.

It is equipped with an autonomous dust extraction system (tube and dust bag). Vacuuming can also be done traditionally - using a vacuum cleaner.

	Pad	Eccentric		Package
420252	150 mm	5 mm	15	1 pc.



RANDOM ORBITAL SANDER 15 MM ECCENTRIC

Intended for final	polishing of si	urfaces and is desig	gned for long-te	rm use.



2-HAND GEAR-DRIVEN SANDER 150 MM PAD

125 mm

Planetary sander with dust extraction for fast material removal and coarse grinding, speed control. Sanding pad with VELCRO mounting system.

	Eccentric	Add. grip	Package
420450	- 5 mm	no	
420452	· əmm	yes	



AIR ANGLE DIE GRINDER

Pneumatic angle grinder mini-stripping machine is ideal for cleaning surfaces from rust, dirt, etc. Precision design, which is equipped with a double ball bearing. The speed controller has a protective mechanism. Maximum speed 18,000 rpm.

Art.	HP	RPM	Package
420510	0.5	- 18,000	
420515	0.75	- 18,000	1 pc.



LOW SPEED. LOW NOISE AIR DIE GRINDER

Straight grinding machine has a mini-durable and lightweight composite design, convenient controllers, which allows you to adjust the speed of rotation.

Art.	RPM	Package
420566	3,600	1 pc.




5" ANGLE GRINDER 1.3 HP

Stable operation of heavy-duty wiper motor pneumatic grinder is achieved by increasing the load. The two-chamber engine has high power, high torque and

422800	11,000	1 pc.





420920	2 mm	1 pc.







RUST & PAINT REMOVAL TOOL

Tool for stripping works. The advantages of the pneumatic tool for removing rust and paint is the best result for performance, durability, surface quality, ease of operation and balance.

420100	no	
420110	yes	- 1 pc.



This tool can be used in areas where conventional polishing machines can not work. Equipped with a rotary knob 180°, protection against unexpected start and stop button shaft. Silenced construction.

420800	2,500	1 pc.

ANGLE SANDER/POLISHER

Equipped with a rotary knob 180°, protection against unexpected start and stop button shaft. Silenced construction.

420810	1,800	1 pc.	



One of the main advantages of the set - using at all stages of work with the help of different accessories, you can select the desired level of hardness brushes.

- Pneumatic tool for removing rust and paint . Wheels for removal of rust and paint
- · Base for the discs and brushes

420150	



PNEUMATIC TOOL AIR HOSE WITH 50 CM OUTPUT

Specially designed air connection for pneumatic tools to divert exhaust air away from the user during operation. Makes the use of pneumatic tools more convenient

Art.	Package
/22220	



DIGITAL PRECISION PRESSURE REGULATOR

Lightweight and modern air pressure regulator with digital scale. Can be attached to the wall or directly to the equipment. Air inlet and outlet are compatible with 1/4" internal thread.

420001	1 pc.

SANDING AND BACK-UP PADS













Universal back up pads for abrasive discs are generally composed of a high quality plastic and rubber and specially designed surface for attaching abrasive discs with Velcro system. Materials that are specially chosen for specific characteristics of weight, stability and mechanical resistance prevent vibration during sanding.

Function: universal back up pads for abrasive discs fits all the types of modern sanding machines, both electrical and pneumatic and are designed for attaching abrasive discs with 6+1, 8+1 and 15 holes with Velcro system. They are recommended to use in such areas as car repair, wood and metal working, etc. Universal back up pads for abrasive discs fits the requirements of all the leading manufacturers of orbital sanding machines.

500002	Ø 150 mm	15	1 pc.
500556	Ø 150 mm	Multihole	1 pc.

Perfect in combination with Random orbital sanders art, 420025; 420050; 420252 (see "Pneumatic tools" section)

PROTECTIVE PAD

Protective pad for disc protection

Art.	Size	Number of holes	Package
500003	Ø 150 mm	15	1 pc.

UNIVERSAL SOFT INTERFACE PAD

Universal soft interface pads for finish made of wear resistant polyurethane foam with Velcro system for abrasive discs.

Function: universal soft interface pads are intended for use with microfinishing abrasive film discs for getting an ideal quality surface. They also provide fine surface contouring for the abrasive discs on difficult shapes of modern vehicles.

Art.	Size	Number of holes	Package
500004	Ø 150 mm	15	1 pc.
Perfect in combination with Random orbital sanders. For using with RADEX universal back-up pad, art. 500002 [see "Pneumatic tools" section]			



Self-pripping material are used to apply on worn orbital sanding machine pads as replacement and increase the pad's life.

Art.	Size	Number of holes	Package
681103	Ø 150 mm	15	1 pc.



VELCRO PAD FOR ROTARY MACHINE, M14

Universal pad in various sizes for sanding and polishing discs.

Art.	Size	Package
500000	Ø 125 mm	
500005	Ø 75 mm	
500555	Ø 152 mm	



MINI HAND BLOCK

Made in rigid microporous rubber, indicated for spot repair. Perfect for using with RADEX Micro abrasive sanding discs Ø 35mm.

681104	Ø 30 mm	1 pc.



TAKE AWAY KIT

The set contains a paint planer holder with a magnet and a rectified blade, suitable for removing dry paint-tears and embedded dust nips from the surfaces. The rectified blade is fixed on paint planer holder thanks to a magnet located in it, while the upper side of the holder has Velcro* for fixing mini sanding abrasive discs Ø35mm size.

681105	Ø 30 mm	1 pc.



DOUBLE SIDE ROUND HANDBLOCK

Manual PU Hand-block, suitable for all sanding operations, specially for denib sanding with P1500-P3000 grits on Ø35mm size abrasives.

681106	Ø 35 mm	1 pc.





Pad for using small diameter discs, intended for the local treatment of welds, tight



PAD HOOK-UP

Sanding pad for abrasive discs is a high quality plastic and rubber mounting system for the holed abrasives with the VELCRO system.

	421500	150 mm	15	
	421550	150 mm	6	
-	421556	125 mm	7	
-	421555	75 mm	0	
-	421557	30 mm	0	
•	421558	38 mm	0	



WIRE WHEEL

Wire brush from spring steel to clean rust and paint coatings.





FIBRO CLEANING DISC

Fiber disc is designed to remove rust or paint from metal and plastic surfaces The quick coupling makes it easy connecting to the instrument pad and replacing it with a new disc. Max 5000rpm. It is recommended to use it with the RADEX Fibro disc pad art. 420500 and angle grinder art. 420510; 420515.

420311	Black	60 mm	
420312	Black	76 mm	
420321	Purple	60 mm	25 pcs.
420322	Purple	76 mm	

NYLON FIBER DISC

Nylon fiber disc is designed to remove rust or paint from metal surfaces. Max 5000rpm. It is recommended to use with the RADEX small shaft grinding kit

_	420362	Black	150 mm x 13 mm		
_	420371	Blue	100 mm x 13 mm		
_	420372	Blue	150 mm x 13 mm	10 pcs.	
_	420391	Black	115 mm x 13 mm		
_	£20292	Plus	115 mm x 12 mm		



In combination with Small shaft grinding.



The wheel consists of a porous material impregnated with abrasive, represents an excellent alternative to a wire brush in removing lacquers, adhesives, and rust. The flexible structure of the wheel is particularly important in the processing of relief and inaccessible areas. Due to its volume structure, wheel does not become clogged and quickly removes any cover.

Art.	Size	Package
420102	30 x 105 mm	1 pc.

HUB

The central axis for metal brushes. Use with pneumatic tools.

420103	22 mm	
420104	10 mm	- 1 pc.



RUBBER ERASER WHEEL

Rubber eraser wheels are created for removal of adhesives, strips, stickers and double-sided tape. The wheels do not damage or scratch the paint. Efficient and durable.

Art.	Size	Properties	Package
140907	15 x 90 mm		
140908	15 x 100 mm	corded	
420101	30 x 105 mm		1 pc.
140906	15 x 90 mm	flat	



0



PROTECTIVE CLOTHING



For protection against dirt and chemical pollutants RADEX represents different types of hi-tech protective clothes, which gives not only protection but convenience and comfort in use.



NITRILE DISPOSABLE GLOVES

Blue powdered high quality nitrile disposable gloves packed in 100 pieces in a dispenser box. These ambidextrous gloves have textured fingertips for enhanced grip, a rolled cuff for easy on/off and they are ideal for use in automotive, general maintenance and manufacturing applications.

102400	М	
102401	L	100 pcs.
102402	XI	



HIGH PERFORMANCE LATEX DISPOSABLE GLOVES

High performence disposable gloves packed in 100 pieces in a dispenser box. Gloves are several times stronger than nitrile, rubber or vinyl. Offers optimum comfort to hands that is combined with optimum protection. Powder free.

101402	М		
101400	L	50 pcs.	
101601	ΥI		



PARTICULATE RESPIRATOR WITH EXHALE VALVE P2

Respirator with exhalation valve. Provides class P2 protection against toxic and wood dust, metal smoke and aerosols. Soft foam cushion inside and adjustable straps provides the wearer an easy, comfortable fit.

101501	20 pcs.



RADEX Polyester overalls are 100% polyester, silicone free, lint free, antistatic durable, light weight and comfortable. Provides sufficient air and vapor penetration. 2 way covered zipper and with front pocket. Elastic at ankle, waist and wrist. Hood with drawstring.

Function: RADEX Polyester overalls are protective suits for painting. Overalls are intended for protection against external pollution and chemical substances. Overalls can be used in automotive, aviation, air field, fuel and oil saheres.

101111	S	
101112	м	
101113	L	
101114	XL	— 1/50 pcs.
101115	XXL	



BIR-TROUSERS

Bib-trousers made of 100% cotton. Features triple stitched seams on the outer side of the leg and on the bib, side slits with button, itly with zip, elastic waistband, front pockets with reinforced seams, rear pocket and right ruler pocket, bib pocket with two pockets, elastic shoulder straps with quick-fastening buckles and rear-bib.

102111		48	
102112		50	
102113	Grey	52	1 pcs.
102114		54	
102115		56	
102110			

PUTTIES



The most important considerations in the process of creating RADEX putties:

- High quality components for putty producing;
- High quality standards.







EASY LIGHT PLUS

Significantly increased amount of filler with a stable physical condition.

- · Ball shaped elements Very light - hollow inside
- . Resistant to solvents no resin suction, what helps to react
- hardener + substancer . New substance and form reduces the weight of putty (density - 880 g/l)
- · Application is very smooth
- Better adhesion · Time and sanding paper economy

Can be applied on polyester plastics, metal and aluminum surfaces.

	200301	1 L + hardener
		H ALUMINUM POWDER
	Contains aluminum additi	
radexe	 Improved thermal state Very low shrinkage on 	oility ensures optimal adhesion hardening time



1/6 pcs.

6	-	-
1	radexe	_
	MULTI SOFT	-

MULTI SOFT

200400

- . Multifunctional fill and fine putty with anti-shrinking properties
- . Equipped with special additives for enhanced elasticity
- and significantly reduced shrinkage during the curing process . This putty prevents contour marks after repair process
- · Very soft and easy to sand

Can be applied on: all metal surfaces, including steel, galvanized steel, aluminum as well as to polyester substrates.

200110	1.8 kg + hardener	1/10 pcs.







Multifunctional, the most universal polyester putty.

- Good adhesion to different bases
- Ease of application, including a thin layer Easy to sand by any abrasive grade (fine and coarse)
- Small defects filling Creates a very smooth surface after application

Reduces sanding time Can be applied on: all metal surfaces, including steel, galvanized steel, aluminum as well as to polyester substrates

200200	1.8 kg + hardener	1/6 pcs.
200201	0.2 kg - bardoner	1/2/ pec

GREEN GLASS

Hardened with fiberglass.

- . Has better flexibility than conventional putties because of elastic
- polyester resins and medium fibers · Keeps high mechanical strength
- High adhesion on different surfaces and zinc

Can be applied on polyester plastics, metal, zinc and aluminum surfaces.

200600	0.2 kg + hardener	1/24 pcs.		
200401	1 9 kg + hardener	1/4 pcc		

PLASTIC FLEX

- Putty for plastics and plastic surfaces
- . Has a very high elasticity, because of extra-plasticizer
- Excellent adhesion to most plastics (except polyethylene and Teflon)
- . Can be used on unprimed surfaces

Can be applied on: plastics, with the exception of polyethylene and polytetrafluoroethylene (PTFE), metal, zinc and aluminum surfaces.

200500	0.5 kg + hardener	1/12 pcs.	ī



UNI

- . Universal, can be applied to a wide range of surfaces
- . Good for filling large and small surface defects
- . Gives a smooth surface after sanding
- . Keeps shape while sanding because of correctly selected putty
- Rapid achievement of a good hardness for sanding. including at low temperatures, reducing time

Can be applied on polyester plastic, metal, aluminum, zinc.

200100	0.5 kg + hardener	1/18 pcs.
200101	1 8 kg + bardener	1/4 pce



UNI+ PUTTY

- . Especially creamy fill and fine putty
- . Adheres to all vehicle surfaces including zinc-coated
- · Very easy application and shaping, short drying time and excellent sanding properties are the main features of this product

Can be applied on: all vehicle surfaces, including zinc-coated.

200102	1.8kg + hardener	1/10 pcs.



MULTI GLASS

- Super light weight putty with glass fibres
- . Characterized by creamy consistency, which allows to easily work
- in 2 4 mm layers and to grind with high granulation abrasives Possibility of using higher granulation abrasives (coarse cut P120 - P150)
- . This putty is designed particularly for large repairs of heavily

damaged surfaces



SPRAY FILLER

- · Special putty that can be used as filler
- Application by pneumatic spray gun
- Can obtain a perfectly smooth surface, even over large areas . Curing time is about 2 hours (reduced in proportion to an increase in
- temperature, but not above 60 °C)
- · Has very high insulation properties . Protects against the harmful effects of overdose, or use a small
- amount of hardener in polyester putty, applied with a spatula . Can be applied to epoxy primer after 4 hours . Is used for both mechanical and manual sanding by fine abrasive
- Can be applied on polyester plastic, PE putties, metal, aluminium

200700	0.8 L + hardener	1/6 pcs.



REPAIR KIT

- . Two-component polyester repair set for small repairs of holes or splits in metal or laminate materials such as rusted places on car bodies, boats or camping caravans
- . Glass texture soaked with polyester resin forms compact base for application of next layers of putties during the repair

Can be applied on: metal, steel, aluminum, old lacquer coatings, two-component acryl fillers.

Art.	Volume	Package
200800	250 g resin can + 5 g PE-initiator tube + 0.25 m² fiberglass	1/20 pcs.

	Ly		<u>~</u>		\odot	Z.	
	Clean & sand surface	Degrease	Mixing ratio/ Potlife				Safety measures
EASYLIGHT PLUS	•		3-4/100	5-8 min/20°C	25-35 min/20°C		
ALU	•		2-3/100	4-6 min/20°C	20-30 min/20°C	1. P80+P120	
SOFT	•	•	2-3/100	4-6 min/20°C	20-30 min/20°C	2. P150-P240	
GREEN GLASS			2-3/100	4-6 min/20°C	25-35 min/20°C		
PLASTIC FLEX	•	•	2-3/100	5-8 min/20°C	30-45 min/20°C	P180-P320	
UNI	•	•	2-3/100	4-6 min/20°C	20-30 min/20°C	1. P80-P120 2. P150-P240	Use protective equipmen
UNI+		+	2-3/100	3-5 min/20°C	20-30 min/20°C	P150-P320	
MULTI SOFT			2-3/100	3-5 min/20°C	20-30 min/20°C	P150-P520	
MULTI GLASS			2-3/100	3-5 min/20°C	25-30 min/20°C	P120-P320	
REPAIR KIT	•	•	2-3/100	10-15 min/20°C	45 min/20°C 15 min/60°C	P80-P120	
	Ly		<u>&</u>			Z.	
	Clean	Degrease	Mixing ratio				Safety

EASY LIGHT PLUS, ALU, SOFT, GREEN GLASS, PLASTIC FLEX, UNI, UNI+, MULTI SOFT, MULTI GLASS: VOC limits: VOC II / B / b limit = 250 g/l VOC = 90 g/l

Readiness of the mixture in compliance with Directive 2004/42/CE

RADEX SPRAY FILLER-VOC limits: VOC II / B / b limit = 250 g/L VOC = 150 g/L

EU/2004/42 Cat.II B(b) VOC 540 g/l VOC max<540 g/l

PRIMERS 1



of application, excellent adhesion and excellent filling properties.



EVO PRIMER 4:1 HS

RADEX EVO PRIMER 4:1 HS is a two-component high solid (HS) polyester primer that provides high build over existing coatings and properly prepared steel and aluminum substrates. Use with RADEX hardener VP30 (standard) or RADEX hardener VP10 (fast).

Description: product is used as standard filler. This primer has excellent filling, drying and sanding properties important in today's custom and restoration market. When applying, product forms a «film» layer whose thickness is more than 10 micrones. Available in three colors: white, gray and black.

Primer EV0 4:1 HS	800000	white		
	800001	grey		1/4 pcs.
	800002	black		
	800010	grey	0.8 L	1/6 pcs.
Hardener VP 30	800130	standard	2.5 L	1/4 pcs.
Hardener VP 10	800110	fast	2.5 L	1/4 pcs.



NON - STOP ADDITIVE

EVO primer additive - special activator for extra fast drying and wet on wet priming. In combination RADEX EVO primer with NON-STOP additive allows a very quick processing followed by heal-drying or drying at room temperature. This offers avering potentials in terms of spray booth occupancy, stoving times as well as working time. It is also suitable to fill partial areas (Spot repair) without sinkage or visible marks in the outer rim.

840060	11.	1/6 pcs.



EP EPOXY PRIMER

Provides exceptional corrosion protection and is especially geared to sensitive factory primers and any other 2-coal finishes. This primer can be used as adhesion promoter, wet-on-wet primer filler with corrosion protection or sanding primer filler under all topcoats. Use with RADEX EP hardener.

Description: as a consequence of the good adhesion and flexibility, the product is particularly suited for repairing aluminum and fiberglass surfaces, as well as powder coatings. EP Primer has strong anti-corrosion properties, excellent adhesion on all surfaces, corrosion, humidity chemical and mechanical resistance.

Primer EP	800003	1 L	1/6 pcs.
Hardener EP	800100		iyo pes.







CR+ WASHPRIMER

CR- Washprimer is an anti-corrosion wash primer based on polyvinyl resins. The product ensures excellent adhesion to various substrates and very high anti-corrosion resistance, also on damaged coating iscratches and chips of the paint coating). Intended for application in thin layers in combination with any acrylic filter.

Function: CR + Wash primer is perfectly suited for the adhesion on substrates such as steel, aluminum and galvanized surfaces.

Product offers a 100% corrosion protection on the substrates. The wash primer is also ideal for isolating putty spots before the filler application.

		Volume	
Primer CR+	800012	0,8 L	1/6 pcs.
Activator CR+	800051	0.4 L	. 176 pcs.

RUST STOP PROFESSIONAL CONVERTER & PRIMER

RUSTSTOP water-based converter and primer - polymer system that converts corrosion products, stops the corrosion process and establishes a durable matt-black coating.

Function: RUST STOP is used on rusty metal surface, metal constructions and automobile parts processing.

Important: before use clean the surface of dirt, grease and rust. Carefully shake the bottle. With a brush or roller, papily to are a to be treated. After a short time the surface will begin to become black. This is indicative of the enset of the rust conversion process. After three hours is 20 "CIII be corresion process will be complicity finished. Subsequently, ARIOR KINDS TOP Cataling surface can be with the complicity finished. Subsequently, ARIOR LONG Subsidies with the finished surface can be with water. Protect from freezing.

800006	0.05 L	1/50 pcs.
800008	0.2 L	1/27 pcs.
800009	11.	1/6 pcs.

VHS PRIMER 4:1

Fast drying primer/filler. It has very good application properties – excellent levelling and filling. Primer is dedicated for different kinds of repairs and can be used like compact filler or secondary primer. Excellent sanding properties without clogging of sanding paper. YHS Primer 4:1 gives corrosion protection and very good adhesion on different kind of metal surface.

	800700 white	3.6 L	1/4 pcs.	
Primer VHS 4:1 -	800720	- write	1L	1/12 pcs.
	800701		3.6 L	1/4 pcs.
	800721	- grey	11	1/12 pcs.
	800702		3.6 L	1/4 pcs.
	800722	– black	11.	1/12 pcs.
Hardener VPR -	800771		0.9 L	1/4 pcs.
nardenervek -	800727		0.25 L	1/12 pcs.

Please look for RECOMMENDATIONS of product use on next page



1K PLASTIC PRIMER & FILLER

Fast-drying plastic primer & filter has excellent filting properties which can be applied on commonly used plastics in the automotive industry. Product can also be applied on extremely difficult plastics such as PP without additional pretreatment

800004	grey	1 L	1/6 pcs.

RECOMMENDATIO	NS:						
	Ü,			<u>&</u>	21/1/		
		Apply			Interlayer drying	Drying time	Safety measures
EV0 4:1 HS; VP30/ VP10: AT10/ Accelerator Volume: 4:1 + 10% Weight: 160+24+8	DIN4 (20 °C) =25-30 s	1.6-1.8 mm	1-5; <300 µm	VP10 1 h/20 °C VP30 2 h/20 °C	10-15 min/ 20 °C	3-5 h/20 °C VP10 30 min/60 °C VP30 40 min/60 °C	
EVO 4:1 HS: VP30/ VP10: Non-Stop Additive Volume: 4:1+20%	DIN4 (20 °C) =18-225		2-3; <100 µm	VP10 30min/20 °C VP30 50min/20 °C	5-10 min 20 °C	90min/20 °C	
EVO 3:1 HS: VP30/ VP10: Non- Stop Additive Volume: 3:1+20%	DIN4 (20 °C) =14-16s	1.3-1.4 mm	1-1.5; «40 µm	30-40 min		Overpaint 10 min/20 °C	
EP Primer:EP Hardener + AT 30 thinner Volume: 2:1+10-25%	DIN4 [20 °C] =17-23 s	1.2-1.6 mm	1-2; 25-50 μm; 10 m²/l – 35 μm	5 h/20 °C	10-15min/ 20 °C Overpaint 30-45min	12 h/20 °C 30 min/60 °C	protective equipment
Primer CR: Activator Volume: 2:1 Weight: 100:80	DIN4 (20 °C) =18-20 s	1.2-1.5mm	1-2; 10-15 µm; 12m²/l – 10µm	2 days/20 °C	10-15 min/ 20 °C	15 min/20 °C	
1K Plastic Primer Filler Volume: 100 + 50-100% AT10/AT30	DIN4 (20 °C) =18-22s		1-3; 15-40 µm			Overpaint 15-20 min	
VHS Primer: VPR Hardener Volume: 4:1 Weight: 150:25	DIN 4 (20 °C) =20-30 s	1.6-1.8mm	1-3; <250 µm	1 h/20 °C	5-7 min/ 20 °C	3-5 h/20 °C 15-20 min/ 60 °C	

CLEARCOATS



elasticity and brilliant gloss.







2K CLEARCOAT HS

RADEX 2K Clearcoat HS is an acrylic clearcoat that has a high solids content and is highly scratch resistant (SR). High hardness, UV resistance and weather resistance guarantee high durability, while the gloss and depth ensure an excellent appearance of the coated surface. The recommended coating thickness is obtained by applying one and a half layers. The good flowability and quick drying time assure easy repair and short time of processing in the painting booth. It is available in versions with the standard or fast hardener. The selection of specific hardener depends on the application conditions.

Function: due to its properties, RADEX 2K Clearcoat HS is a clearcoat that enables easy reproduction of the factory paint coating structure. It has good dry spray absorption, which makes it perfect for coating large surfaces. Recommended to use in combination with RADEX standard hardener VC30 or fast hardener VC10 in propertion 2:1.

2K HS clearcoat -	810001		5 L	1/4 pcs.
ZK H5 clearcoat =	810003		1 L	1/6 pcs.
Hardener VC 30 -	810240	- standard ·	0.5 L	1/6 pcs.
	810130	- standard ·	2.5 L	1/4 pcs.
Hardener VC 10 =	810110		0.5 L	1/6 pcs.
	810210	- fast ·	2.5 L	1/4 pcs.
2K HS ECO clearcoat	810004		11.	1/6 pcs.
Hardener VC20 ECO	810170	standard	0.5 L	1/6 pcs.

2K EXPRESS CLEARCOAT

RADEX 2K Express Clearcoat is an acrylic clearcoat that is highly scratch resistant (SR). The product has a very short drying time. It is recommended for fast repairs. The product reaches operating hardness in just 20 min at 60 °C or after 8 h at 20 °C. Does not lose gloss over time. It is UV and weather resistant. Function: a fast clearcoat which speeds up your working processes with a fast drying time. It has a mixture ratio of 2:1 + 15-20% AT10. The clearcoat is easy to

handle, has a deep gloss and a drying time of only 15 minutes at 60 °C.						
	Art.	Volume	Package			
2K Express Clearcoat	810002	11.				

2K VHS CLEARCOAT

Very fast curing 2-part acrylic clear coat characterized by rapid early hardness. It is ready for polishing after only 15 minutes of forced drying at 60 °C and cooling down. Very good flow and levelling properties. High gloss and final hardness. Outstanding durability due to chemical. UV and weather resistance Well balanced pot life enables safe application. Designed for use on solvent and water-based base coats. Very high solids and VOC product. Due to its properties, Radex VHS Clearcoat is a clearcoat that enables easy reproduction of the factory paint coating structure

2K VHS clearcoat	881101	5 L	
VHR15 clearcoat hardener	881201	2.51	· i/4 pcs.













RADEX 2K HS+ CLEARCOAT

New generation top quality high solid anti-scratch clear coat. Due to ultra-fast drying technology and outstanding initial hardness, it saves repair time and energy, Easy application ensures a good-looking and high-gloss coating, Can be applied over solvent- and waterborne base coats.

Excellent result can be achieved in spray booths with forced drying just in 15min/60°C and as well without it at 2-2.5h/20°C.

K HS+ clearcoat	883301	5 L	- 1/4 pcs.
K HS+ clearcoat hardener	883311	2.5 L	1/4 pcs.
K HS+ clearcoat thinner	883399	1 L	1/12 pcs.

ACRYL THINNERS

Thinners are recommended for using with RADEX EVO Primer 4:1 HS, RADEX EP Epoxy Primer, RADEX 2K Clearcoat HS and 2K Express Clearcoat, 1K plastic primer&filler.

AT30	820135	- standard ·	5 L	1/4 pcs.
AT30	820130	- standard ·	0.5 L	1/6 pcs.
AT10	820110	fast	0.5 L	1/6 pcs.
UNU	020000			5//

THINNER FOR METALLICS

Universal thinner for solvent basecoat metallics. Fits to all solvent basecoat painting systems.

Art.	Votume	rackage
820105	51	1/4 nes

SPRAY GUN CLEANER NITRO THINNER

High quality solvent based cleaner - thinner for spray guns and other painting

equipment.		
820111	251	1 ncs.

DEGREASERS

Degreaser is a solvent cleaner for use on surfaces which will be refinished. The cleaner is particularly suitable for the first cleaning step to remove tar. grease and silicones from vehicles which will be refinished. The product can also be used for the initial cleaning of composite plastics.

D20 4	830031		1 L	1/12 pcs.
D30 degreaser	830030	- medium	5 L	1/4 pcs.
D10 degreaser	830010	fast	5 L	1/4 pcs.



ACCELERATOR

Special additive improving drying time of fillers and clear coats. For the clear coat it can be used only with slow and standard hardeners. The drying time will be shortened by 15%.

840040	1L	1/6 pcs.



SPOT BLENDER

Product is designed for dissolving the overspray and fade out edge created during spot repairing or blending. It can be used with any RADEX acrylic clearcoat. It helps to eliminate optical differences between new and earlier applied clear coat. Spot Blender is not for use with base coats.

cour. Spor Dichael 15 horie	ase min base coats.	
840050	11	1/6 pcs.

RECOMMENDATIONS

	Ţ:			£	21/1/	\odot	
Mixing proportions	Viscosity	Apply	Layers	Potlife	Interlayer drying	Drying time	Safety measures
2K Clearceat H5:VC30/ VC10/ AT30/ AT10/ Accelerator Valume: 2:1+10% Weight: 100:50:9	DIN4 (20 °C) =15-17 s	Conventional gravity fed spray gun: 1,3-1,4 mm; 3-4 bar; 15-20 cm Low-pressure gravity fed HVLP spray gun: 1,2-1,3 mm, 2 bar; 10-15 cm	1.5; 20-40µm; 8m ³ /l - 60µm 2; 30-30µm; 8m ³ /l - 60µm	VC10: 30 min/ 20 °C VC30: 2 h/ 20 °C	5-10 min/ 20°C	14 h/20 °C VC10: 30 min/60 °C VC30: 45 min/60 °C	
2K Clearceat Express/VRS/ AT10/Accelerator Volume: 2.1+ (15-20%) Weight: 100:49:18	DIN4 (20 °C) = 17-18 s	Conventional gravity fed spray gun: 1,3-1,4 mm; 3-4 bar; 15-20 cm Low-pressure gravity fed HVLP spray gun: 1,2-1,3 mm, 2 bar; 10-15 cm	2; 25-25µm; 7.3 m³/l – 50µm	30 min/ 20 °C	3+5 min/ 20 *C	8 h/20 °C 20 min/60 °C	Use protective equipment
2K VHS Clearcoat: VHR15 clearcoat hardener Volume 2:1 Weight 100:50	DIN4 [20 °C] = 16-18 s	1.3 mm	1.5; 1/2 thin closed coat + 1 full wet coat 50-60µm; 10-12 m²/l	50 min	5-7 min	3,5 - 4h/ 20 °C 15min/ 60 °C	
2K HS+ clearcoat: 2K HS+ clearcoat hardener/thinner Volume: 2:1+10%	DIN 4 (20 °C) = 15-17 s	1.3 mm	2; 50-60 µm; 8.5-10.5 m²/l	up to 100 min	4-6 min	Dust free drying 20 min./20 °C; Dry to touch 45 min./20 °C; Full hardness 2 h/20 °C; Dry to polish 2 h/20 °C; Ory to polish	

AEROSOLS



RADEX SPRAY-IT is a range not only for the do-it-yourself enthusiasts in the automotive field but also for professional users. We fill only aerosols with PRO level paint products. Excellent application, fast drying and perfect adhesion to any kind of





SPRAY-IT PAINT

High-quality SPRAY-IT paint has a wide range of applications for the automotive repair and other fields, excellent hiding power, strength and durability of the coating.

-	400501	black matt		
	400502	black gloss	- 500 ml	10
	400503	white gloss	- 500 mt	1/6 pcs.
	100505	-11		







SPRAY-IT PRIMER

SPRAY-IT Primer fills small pores and grinding traces on the surface. It has good fillability and fast drying. It creates a layer suitable for coating all types of paints.

400506	grey		
400507	black	500 ml	1/6 gab.
400509	white		



SPRAY-IT CLEARCOAT

SPRAY-IT clearcoat has a great gloss, durability and increased resistance to the effects of weather and mechanical stress.

400504	500 ml	1/6 gab.





EPOXY PRIMER

Primer for universal use, in particular for repairing small damaged areas through to spot repairs. Best possible adhesion on all metals. Contains epoxy binding agent, excellent corrosion protection. Insulating effect against moisture. Can also be used on various plastics and glass fibre-reinforced synthetic materials. Yery fast drying, can be sanded immediately.

400773 black 500 mt 1/8 pc	400771	light grey	- 500 ml	1/6 pcs
	400773	black	- 500 mt	1/0 pcs



PRIMER FOR PLASTIC

Spray-it plastic primer is a good adhesive for painting hard plastics, has good adhesion and coverage properties, and can be painted over with most car paints, incl. water-based paints.

400509M	400 ml	1/12 pcs.



SPRAY-IT AEROSOL PRE-FILLED

One- component semi finished product with propellant and special additives, RADEX Prefilt can be filled with solvent- based varnish (400mt can + 100mt varnish). It allows to match the color to standard shades without using a spray gun. Very easy application, non-irritating smetl.


400500	400 ml	1/12 pcs.



AEROSOL FILLING MACHINE

Pneumatic machine for quick filling of 400 mt aerosol cans with automotive or industrial paints. The high efficiency allows you to fill approximately 300 spray cans per day. Suitable for filling 1K and 2K semi-finished products, as well as for filling sprays with water-based and solvent-based varnishes. It does not require a power supply, just compressed air.

	aerosol filling machine	302400
1 pc.	piston and cylinder set (standart)	302441
	piston and cylinder set (Clean-Jet)	302442





SPRAY GUNS

High quality spray guns for professional automotive, wood / furniture and industrial use. STAR nozzles and needles are made of 100% high quality stainless steel. The STAR brand of spray guns are manufactured under the strictest standards and are well known for their high quality workmanship. With this also comes a reputation of affordability, with Star spray guns known to outperform other spray guns with over twice their price tag.

SMV-4F-G	1.4, 1.6, 1.8, 2.0, 2.5, 3.0	29 [2.0 BAR]	10.5-12.5	290-340
EVO-T-4F-G	1.2, 1.3, 1.4, 1.5, 1.6, 1.8, 2.0	19-22 (1.3-1.5 BAR)	10.0-12.0	240-280
EV0-T-106TF	0.5, 0.8, 1.0, 1.2	15-19 [1.0-1.3 BAR]	3.0-4.5	100-150
XPS	1.0, 1.2, 1.3, 1.4	29 (2.0 BAR)	10.0	320
XPSV	1.0, 1.2, 1.3, 1.4	29 (2.0.BAR)	14.5	300



FILTERS

Air Filtration System L906 Series. Ideal to be installed at the end of pipeline or near spray booth. Removes threats from air line, unleashing full potential of equipment.

Art.		Air filters	Condensate removal
L906	Single stage	5 µm	Manual
L906-A	Single stage	5 µm	Automatic
L906-2W	Single stage	5 µm	Automatic / Manual
L9062-2W	2 - stage	5 μm / 1 μm	Automatic / Manual
L9063MB-A	3 - stage	5 µm / 0.1 µm / A.C.	Automatic

ACCESSORIES















PG 060	Gravity cup	0.6 L	Female thread
PG SMV / SLV	Gravity cup	0.6 L	Male thread

S-081C	Analogue manometer	
S-081CD	Digital manometer	

on separator (on pr	PUF 906-07-01	Filter element	For L9062MB / L9063MB water and oil separator (0.1 µM)

S-091A	Paint filter	For 0,6 L gravity cup
S-092	Viscosimeter	DIN; FORD 4
S-093	Spray gun holder	Metal

SF25FT-2	Flexible hybrid polymer air duct	1/4" air duct 7.5m	1/4" Male thread ø 6,4 mm
SF25FT-3	Flexible hybrid polymer air duct	3/8" air duct 7.5m	1/4" Male thread ø 9.5 mm
SF50FT-3	Flexible hybrid polymer air duct	3/8" air duct 15m	1/4" Male thread ø 9.5 mm

E20SFP	Air Quick Connect		1/4" Female thread
E20SHP	Air Quick Connect	6-8 mm (for 1/4" air duct)	
E20SMP	Air Quick Connect		1/4" Female thread
E30SHP	Air Quick Connect	9-11 mm (for 3/8"	

KIT 4F	Repair kit	Gaskets and springs
KIT XPS	Repair kit	Gaskets and springs
KIT 106F	Repair kit	Gaskets and springs



www.radex-auto.com